

The effect of TiO₂ nanoparticles in reduction of environmental pollution in concrete structures

Javad Tabatabaei*

Department of petroleum and geology, Meymeh branch, Islamic Azad University, Meymeh, Iran

(Received January 24, 2019, Revised March 25, 2019, Accepted March 30, 2019)

Abstract. Heterogeneous photocatalysis is developed rapidly in the field of engineering of environmental. It has a good potential to tackle with the enhancing traffic pollution. Adding photocatalyst to usual building materials such as cement and concrete makes friendly environmental materials against the air pollution. TiO₂ nanoparticles are a good item for concrete structures for diminishing the air polluting affect by gasses of exhaust. In specific, the transformation of NO_x to NO₃⁻ is studied and the interaction of TiO₂ nanoparticles and concrete is investigated here by experimental test. This paper presents an overview of the principle of photocatalysis and the application in combination with cement, as well as the results of the laboratory research, especially towards air purifying action. In addition, by the analytical models, the influence of TiO₂ nanoparticles is studied on the stiffness of the concrete. The Results show that TiO₂ nanoparticles have significant effect on the reduction of environmental pollution and increase of stiffness in the concrete structures

Keywords: TiO₂ nanoparticles; concrete structures; environmental pollution; stiffness

1. Introduction

In modern civic environments, the quality of life, mobility and comfort are very important issues. In modern countries, the environmental requests are a significant objective in the projects. Applying TiO₂ nanoparticles in the concrete is one of the new ideas which can leads to environmental pollution. However, we investigate this subject in this article based on experimental and analytical models.

Nanoparticles have good effects on the mechanical, environmental and chemical properties of structures (Babazadeh *et al.* 2016). The materials with self-cleaning properties based on photocatalyst were presented by some researchers. TiO₂ is metal in nature. The oxygen of TiO₂ has 3 molecules of anatase, rutile and brookiet. Rutile is in white tint with little photocatalytic reactivity until now. Anatase is superior for photocatalytic. For this purpose, a UV-light with wave length of 387 mm or lower than it is needed. In addition, the light strength is major for optimization the activity of photocatalytic. Researchers focused on the usage of TiO₂ nanoparticles in air conditioning, water purification, ceramic tiles, selfcleaning, textile, tunnel lightning and etc. This is since to high surface hydrophilicity activatingTiO₂ by UV-light. The layer of water is engrossed between the surface anddirt which wash off of the dirt particles.


(Babazadeh *et al.* 2016, Zhao *et al.* 2017, Zhou *et al.* 2016, Zidi *et al.* 2014, Flores *et al.* 2010). A survey on the application of oxide nanoparticles for improving concrete

processing was presented by Khayati *et al.* (2015). Nonlinear vibration of embedded nanocomposite concrete was investigated by Shokravi *et al.* (2017) based on Timoshenko beam model. A mathematical model was introduced by Bakhshandeh Amnieh and Zamzam (2017) for the concrete models reinforced by silicon dioxide (SiO₂) nanoparticles subjected to impact load. Zamani Nouri (2016) studied stability analysis of concrete pipes mixed with nanoparticles conveying fluid. Azmi *et al.* (2019) studied dynamic analysis of concrete column reinforced with SiO₂ nanoparticles subjected to blast load.

To the best of author knowledge, no work has been presented on reduction of environmental pollution in concrete structures using TiO₂ nanoparticles. However, we presented the effect of TiO₂ nanoparticles on the mechanical properties and reduction of environmental pollution in concrete structures.

2. Laboratory tests

To obtain the air cleaning activity of TiO₂ nanoparticles for building materials, the oxidation of OH and NO into NO₂ is obtained. Matter is carried out for pollution induced by taffic and other subjects. The NO oxidation is written using below equations



Other important items are high temperature and humidity due to water of atmosphere. At higher temperatures, the conversion will be better. The optimum condition is at hot summer daysdue to low humidity and

*Corresponding author, Professor
E-mail: tabatabaei_j@yahoo.com

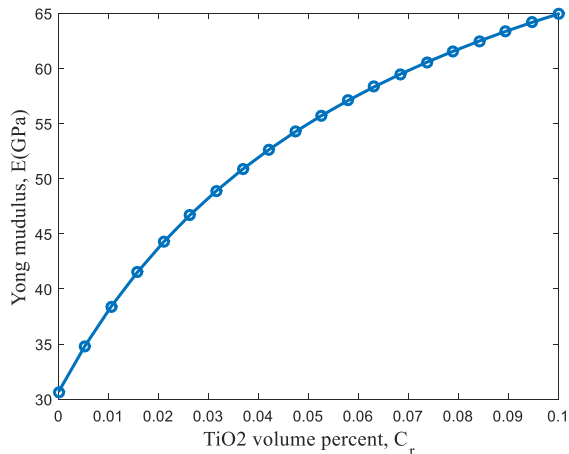


Fig. 4 The effect of TiO₂ nanoparticles on the elastic modulus of the concrete

Based on Mori-Tanaka model, the elastic modulus of the concrete with respect to the volume percent of TiO₂ nanoparticles is shown in Fig. 4. As can be seen, with enhancing the volume percent of TiO₂ nanoparticles, the elastic modulus is increased significantly. In other words, reinforcing the concrete with 10% TiO₂ nanoparticles leads to 65% increase in the elastic modulus. This is due to this fact that with enhancing the volume percent of TiO₂ nanoparticles, the stiffness of the structure improves.

5. Conclusions

The reduction of environmental pollution by applying TiO₂ nanoparticles for construction of concrete structure was studied in this paper based on experimental and Mori-Tanaka model. The effect of using these nanoparticles on the modulus of elasticity was investigated. Results show that after 5 hours, the NO was cut off for 30 minutes. Reinforcing the concrete with 10% silica nanoparticles leads to 65% increase in the elastic modulus. The final reduction is depended to the surface exposed size, material, light intensity, NO concentration, ambient temperature and flow rate. The results shows a little enhance in NO₂ leads to reduction in NO (NO+NO₂).

References

- Azmi, M., Kolahchi, R. and Rabani Bidgoli, M. (2019), "Dynamic analysis of concrete column reinforced with SiO₂ nanoparticles subjected to blast load", *Adv. Concrete Constr.*, **7**, 51-63.
- Babazadeh, A., Burgueño, R. and Silva, P.F. (2016), "Evaluation of the critical plastic region length in slender reinforced concrete bridge columns", *Eng. Struct.*, **125**, 280-293.
- Bakhshandeh Amnieh, H. and Zamzam, M.S. (2017), "Theoretical and experimental analysis of wave propagation in concrete blocks subjected to impact load considering the effect of nanoparticles", *Comput. Concrete*, **20**, 711-718.
- Flores, I., Sobolev, K., Torres, L.M., Valdez, P.L., Zarazua, E. and Cuellar, E.L. (2010), "Performance of cement systems with Nano-SiO₂ particles produced using Sol-gel method", *TRB First*

- International Conference in North America on Nanotechnology in Cement and Concrete*, Irvine, California, USA, May.
- Khayati, G.R., Ghasabe, H.M. and Karfarma, M. (2015), "A survey on the application of oxide nanoparticles for improving concrete processing", *Adv. Concrete Constr.*, **3**, 145-159.
- Mori, T. and Tanaka, K. (1973), "Average stress in matrix and average elastic energy of materials with misfitting inclusions", *Acta Metallurgica*, **21**, 571-574.
- Shi, D.L. and Feng, X.Q. (2004), "The effect of nanotube waviness and agglomeration on the elastic property of carbon nanotube-reinforced composites", *J. Eng. Mater. Tech.*, **126**, 250-270.
- Shokravi, M. (2017), "Vibration analysis of silica nanoparticles-reinforced concrete beams considering agglomeration effects", *Comput. Concrete*, **19**, 333-338.
- Zamani Nouri, A. (2018), "The effect of Fe₂O₃ nanoparticles instead cement on the stability of fluid-conveying concrete pipes based on exact solution", *Comput. Concrete*, **21**, 31-37.
- Zhao, B., Gao, L., Liao, W. and Zhang, B. (2017), "A new kernel method for hyperspectral image feature extraction", *Geo-spatial Inform. Sci.*, **20**, 309-318.
- Zhou, X., Liu, J., Wang, X. and Frank Chen, Y. (2016), "Behavior and design of slender circular tubed-reinforced-concrete columns subjected to eccentric compression", *Eng. Struct.*, **124**, 17-28.
- Zidi, M., Tounsi, A. and Bég, O.A. (2014), "Bending analysis of FGM plates under hygro-thermo-mechanical loading using a four variable refined plate theory", *Aerosp. Sci. Tech.*, **34**, 24-34.

CC