

Dynamic analysis of nanosize FG rectangular plates based on simple nonlocal quasi 3D HSDT

Sabrina Boutaleb¹, Kouider Halim Benrahou¹, Ahmed Bakora^{1,2}, Ali Algarni³, Abdelmoumen Anis Bousahla^{4,5}, Abdelouahed Tounsi^{*1,6}, Abdeldjebbar Tounsi¹ and S.R. Mahmoud⁷

¹ Material and Hydrology Laboratory, University of Sidi Bel Abbas, Faculty of Technology, Civil Engineering Department, Algeria

² Département de Génie Civil, Faculté d'Architecture et de Génie Civil, Université des Sciences et de la Technologie d'Oran, BP 1505 El M'naouer, USTO, Oran, Algeria

³ Statistics Department, Faculty of Science, King Abdulaziz University, Jeddah, Kingdom of Saudi Arabia

⁴ Laboratoire de Modélisation et Simulation Multi-échelle, Département de Physique, Faculté des Sciences Exactes, Département de Physique, Université de Sidi Bel Abbès, Algeria

⁵ Centre Universitaire Ahmed Zabana de Relizane, Algeria

⁶ Department of Civil and Environmental Engineering, King Fahd University of Petroleum & Minerals, 31261 Dhahran, Eastern Province, Saudi Arabia

⁷ Department of Mathematics, Faculty of Science, King Abdulaziz University, Jeddah, Saudi Arabia

(Received October 17, 2018, Revised April 14, 2019, Accepted April 26, 2019)

Abstract. In the present work the dynamic analysis of the functionally graded rectangular nanoplates is studied. The theory of nonlocal elasticity based on the quasi 3D high shear deformation theory (quasi 3D HSDT) has been employed to determine the natural frequencies of the nanosize FG plate. In HSDT a cubic function is employed in terms of thickness coordinate to introduce the influence of transverse shear deformation and stretching thickness. The theory of nonlocal elasticity is utilized to examine the impact of the small scale on the natural frequency of the FG rectangular nanoplate. The equations of motion are deduced by implementing Hamilton's principle. To demonstrate the accuracy of the proposed method, the calculated results in specific cases are compared and examined with available results in the literature and a good agreement is observed. Finally, the influence of the various parameters such as the nonlocal coefficient, the material indexes, the aspect ratio, and the thickness to length ratio on the dynamic properties of the FG nanoplates is illustrated and discussed in detail.

Keywords: nonlocal elasticity theory; FG nanoplate; free vibration; refined theory; elastic foundation

1. Introduction

The discovery of carbon nanotubes (CNTs) introduced a novel era in the nano scientific world (Iijima 1991). Since then, several investigations have been realized in the topic of the physical, electrical, mechanical and chemical behaviors of the nanostructures. The primary works demonstrate that the mechanic properties of the nanostructures are different from other well-employed materials (Miller and Shenoy 2000, Bellifa *et al.* 2017a, Bensaid 2017, Ehyaei *et al.* 2017, Karami *et al.* 2017, Bouadi *et al.* 2018, Bensaid *et al.* 2018, Mehar and Panda 2018, Bakhadda *et al.* 2018, Akbas 2018, Tang and Liu 2018, Yazid *et al.* 2018, Youcef *et al.* 2018, Mokhtar *et al.* 2018, Kadari *et al.* 2018, Karami *et al.* 2018a, b, c, d, Cherif *et al.* 2018, Draoui *et al.* 2019, Adda Bedia *et al.* 2019, Karami *et al.* 2019a, b, Semmah *et al.* 2019). The important properties of such structures have favored their applications in several fields such as nanodevices, nano-bearings, nanooscillators, hydrogen storage, and electrical batteries.

The plate-as nanostructures like nanoplates or nano-

scale sheets are very important kinds of the nanostructures with 2D shapes (Shahadat *et al.* 2018). They contain important mechanic properties (Iijima 1991, Miller and Shenoy 2000, Shen and Zhang 2010, Pradhan and Phadikar 2009, Eltaher *et al.* 2012, 2016, Ebrahimi and Salari 2015, Khorshidi *et al.* 2015, Chami *et al.* 2015, Akbaş 2016, Ghorbanpour Arani *et al.* 2012, Janghorban 2016, Wu *et al.* 2018) and with these unique characteristics they become ideal candidates for multifarious field of nanotechnology industry incorporating energy storage (Ma *et al.* 2008), nano electromechanical systems, strain, mass and pressure sensors (Sakhae-Pour *et al.* 2008a, b), solar cells (Aagesen and Sorensen 2008), photo-catalytic degradation of organic dye (Ye *et al.* 2006), composite materials (Rafiee *et al.* 2010) and ect. The size-dependent continuum modeling of the nanostructures has taken a wide attention by the scientific community because the controlled experimentations in nanosize are difficult and molecular dynamic simulations are highly expensive computationally. We can found in the literature various size dependent continuum models such as modified couple stress theory (Koiter 1969, Mindlin and Tiersten 1962, Toupin 1962), strain gradient elasticity theory (Nix and Gao 1998, Lam *et al.* 2003, Aifantis 1999, Li *et al.* 2016) and nonlocal elasticity theory (Eringen 1972). Among these models, the

*Corresponding author, Ph.D., Professor,
E-mail: tou_abdel@yahoo.com

theory of nonlocal elasticity has been widely employed (Peddieson *et al.* 2003, Reddy 2007, Reddy and Pang 2008, Heireche *et al.* 2008, Murmu and Pradhan 2009a, b, Wang 2009). To overcome the shortcomings of the conventional elasticity theory, Eringen and Edelen (1972) proposed the nonlocal elasticity model in 1972. They modified the conventional continuum mechanics to consider the small scale influences. It should be noted that in the nonlocal elasticity theory, the tensor of stress at an arbitrary point in the continuum of nano-material is related not only on the tensor of strain at that point but also on the tensor of strain at all other points in the continuum. Both the atomistic simulation data and the experimental studies on phonon dispersion indicated the accuracy of this remark (Eringen 1983, Chen *et al.* 2004).

The functionally graded materials (FGMs) are the novel generation of new composite materials in the family of engineering composites, whose characteristics are changed smoothly between two surfaces and the benefits of this combination lead to new structures which can withstand in important mechanical loads under high temperature environments (Ebrahimi and Rastgoo 2008a, b). Presenting new characteristics, FGMs have also attracted considerable research interests, which were principally focused on their bending, buckling and dynamic properties of FG structures (Ebrahimi *et al.* 2009a, b, Boudierba *et al.* 2013, 2016, Hebali *et al.* 2014, Meziane *et al.* 2014, Houari *et al.* 2016, Boukhari *et al.* 2016, Bennoun *et al.* 2016, Bousahla *et al.* 2016, Bellifa *et al.* 2017b, Sekkal *et al.* 2017a, b, Benahmed *et al.* 2017, Atmane *et al.* 2017, Shahsavari *et al.* 2018, Benchohra *et al.* 2018, Younsi *et al.* 2018, Faleh *et al.* 2018a, b, Bouazza *et al.* 2018, Zine *et al.* 2018, Bouhadra *et al.* 2018, Bourada *et al.* 2018, Boukhilif *et al.* 2019, Khiloun *et al.* 2019, Bourada *et al.* 2019, Zaoui *et al.* 2019).

In addition, structural complements such as plates, beams and membranes in micro or nano-length size are often employed as elements in micro/nano electromechanical systems (MEMS/NEMS). Thus understanding the mechanics and physics characteristics of nanostructures is necessary for its practical uses. In past decades, the dynamic of FGMs has been employed extensively. Malekzadeh and Heydarpour (2012) studied the dynamic behavior of rotating FG cylindrical shells under thermal environment by using the first-order shear deformation theory (FSDT) of shells. Ungbhakorn and wattanasakulpong (2013) examined the thermo-elastic dynamic response of FG plates carrying distributed patch mass based on HSDT. Kumar and Lal (2013) examined the first three natural frequencies of the free axisymmetric vibration of the 2D FG annular plates resting on Winkler foundation by employing differential quadrature technique and Chabyshev collocation method. Based on the 3D theory of elasticity and considering that the mechanical characteristics of the materials changed continuously in the direction of thickness, the 3D free and forced vibration investigation of FG circular plate with various boundary conditions was established by Nie and Zhong (2007). 3D elasticity theory was utilized, and novel sets of admissible functions for the kinematics were developed to improve the effectiveness of the Ritz technique in modeling the behavior

of the cracked plates. Matsunaga (2008) analyzed the buckling stresses and the natural frequencies of FG plates by considering the influences of transverse shear and normal deformations. Ke *et al.* (2013) proposed a non-conventional micro-plate model for the axisymmetric nonlinear dynamic analysis of annular FG micro-plates by using the modified couple stress theory, FSDT and von-Karman geometric nonlinearity theory. Ke *et al.* (2012) also investigated the bending, stability and dynamic of annular FG micro-plates based on the modified couple stress theory and FSDT. Asghari and Taati (2013) employed a size-dependent approach for mechanical investigations of FG micro-plates based on the modified theory of couple stress. Kocaturk and Akbas (2012) examined the thermal influence on post-buckling response of FGM beams based on Timoshenko beam theory and by employing finite element formulation. The vibration characteristics of beam with power law properties graduation in the transversal or the axial directions was reported by Alshorbagy *et al.* (2011). Recently, Eltaher *et al.* (2012, 2013a) used a finite element approach for dynamic investigation of FG nanoscale beams based on nonlocal Euler-Bernoulli beam theory. They also discussed the size-dependent bending-buckling response of FG nanobeams by using the nonlocal continuum theory (Eltaher *et al.* 2013b). Dynamic behavior of simply supported Timoshenko FG nanoscale beams were studied by Rahmani and Pedram (2014). Zemri *et al.* (2015) investigated the mechanical response of FG nanoscale beam using a refined nonlocal shear deformation theory beam theory. Belkorissat *et al.* (2015) examined the dynamic properties of FG nano-plate using a new nonlocal refined four variable theory. Ahouel *et al.* (2016) studied the size-dependent mechanical behavior of FG trigonometric shear deformable nanobeams including neutral surface position concept. Bounouara *et al.* (2016) presented a nonlocal zeroth-order shear deformation theory for free vibration of FG nanoscale plates resting on elastic foundation. Khetir *et al.* (2017) developed a novel nonlocal trigonometric shear deformation theory for thermal buckling analysis of embedded nanosize FG plates. Bouafia *et al.* (2017) proposed a nonlocal quasi-3D theory for bending and free flexural vibration behaviors of FG nanobeams. Besseghier *et al.* (2017) analyzed the dynamic response of embedded nanosize FG plates using a new nonlocal trigonometric shear deformation theory. Mouffoki *et al.* (2017) examined the dynamic response of nonlocal advanced nanobeams in hygro-thermal environment using a new two-unknown trigonometric shear deformation beam theory. Karami *et al.* (2019c) investigated the wave propagation of FG anisotropic nanoplates resting on Winkler-Pasternak foundation. Recently, several authors proposed advanced plate/beam theories to study the mechanical behavior of nano- or macro-structures (Belabed *et al.* 2014, Hamidi *et al.* 2015, Kar and Panda 2016a, b, Bousahla *et al.* 2014, Beldjelili *et al.* 2016, Sahoo *et al.* 2016, Draiche *et al.* 2016, Bouazza *et al.* 2016, Mehar and Panda 2016, Becheri *et al.* 2016, Katariya *et al.* 2017a, b, c, El-Haina *et al.* 2017, Fahsi *et al.* 2017, Mehar *et al.* 2017, Ebrahimi *et al.* 2017, Chikh *et al.* 2017, Sahoo *et al.* 2017, Abdelaziz *et al.* 2017, Singh and Panda 2017, Hirwani *et al.* 2017, Katariya and Panda

2018, Ellali *et al.* 2018, Mehar *et al.* 2018a, b, Katariya *et al.* 2018a, b, Kaci *et al.* 2018, Attia *et al.* 2018, Dash *et al.* 2018, Belabed *et al.* 2018, Katariya and Panda 2019, Katariya *et al.* 2019).

In the current work, the dynamic of FG nanoscale plates is studied based on the cubic quasi 3D high shear deformation theory in the conjunction with the nonlocal elasticity model. By considering the integral term in the kinematic led to a reduction in the number of variables and equations of motion. The Navier solution is employed to investigate the dynamic behavior of the FG nanoplates. It is considered that the material characteristics are varying within the thickness according to the power law variation. Numerical results are provided to be utilized as benchmarks for the application and the design of nanoelectronic and nano-drive devices, nano-oscillators, and nanosensors, in which nanoplates act as basic elements. They can also be useful as valuable sources for validating other approximate methods and formulations.

2. Theory and formulation

2.1 Nonlocal power-law FG nanoplate equations

Consider a rectangular nanoscale plate of length a , width b , and total thickness h and composed of FGMs within the thickness as demonstrated in Fig. 1.

$$E(z) = (E_c - E_m)V_f(z) + E_m \quad (1)$$

$$\rho(z) = (\rho_c - \rho_m)V_f(z) + \rho_m \quad (2)$$

where the subscripts c and m denote the ceramic and metallic constituents, respectively, and V_f is the volume fraction that is given by the following expression

$$V_f(z) = \left(\frac{z}{h} + \frac{1}{2} \right)^n \quad (3)$$

where n is the gradient index and takes only positive values. Poisson's ratio ν is the same for all the ceramic/ metal materials that are employed here, so it is considered to be constant and is assumed to be equal to 0.3 throughout the investigation (Reddy 2011). The typical values for metals

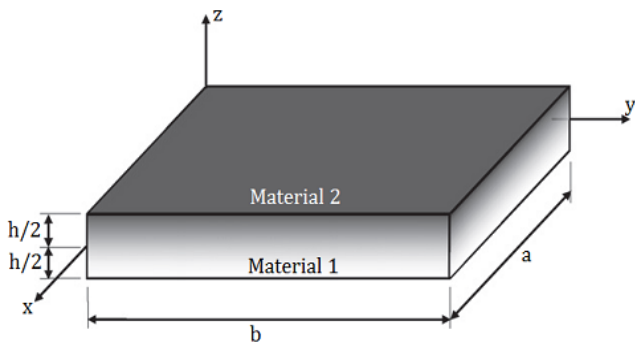


Fig. 1 The geometry of a FGM plate

Table 1 The material properties of the employed FG plate

Material	Properties		
	E (GPa)	ν	ρ (kg/m ³)
Aluminum (Al)	70	0.3	2702
Alumina (Al ₂ O ₃)	380	0.3	3800
Zirconia (ZrO ₂)	200	0.3	5700
Si ₃ N ₄	348.43	0.3	2370
SUS304	201.04	0.3	8166

and employed in the FG nanoscale plate are reported in Table 1.

2.2 The nonlocal elasticity theory

In nonlocal theory, the field of stress at each point body is a function of the field of strain. So stress plays a considerable role in the model which is presented by the following expression (Khorshidi *et al.* 2015)

$$t_{ij} = \int_V \alpha(|X' - X|) \sigma_{ij}(X') dV' \quad (4)$$

where X is a point on the body that the tensor of stress on its efficacy, X' can be any point else in the body, V is the volume of a region of the body that integral is considered on it, σ_{ij} is the tensor of classical stress, $\alpha(|X' - X|)$ is the nonlocal kernel function related to the internal characteristic length. With respect to characteristics of nonlocal kernel function $\alpha(|X' - X|)$ that are presented by Eringen (1983), taking in a Greens function of a linear differential operator, \mathfrak{I} , can be defined as following

$$\mathfrak{I}\alpha(|X' - X|) = \delta\alpha(|X' - X|) \quad (5)$$

Substituting Eq. (5) into Eq. (4), the primary expression (1) form of the following differential equation is determined as

$$\mathfrak{I} t_{ij} = \sigma_{ij} \quad (6)$$

For the nonlocal linear elastic solids, the equations of motion have the following form (Narendar 2011)

$$t_{ij,j} + f_i = \rho(z) \ddot{u}_i \quad (7)$$

where ρ is the mass density, f_i body loads and u_i is the vector of displacement. Substituting Eq. (7) into Eq. (6) yields to the following relation

$$\sigma_{ij} + \mathfrak{I}(f_i - \rho(z) \ddot{u}_i) = 0 \quad (8)$$

The nonlocal theory with the linear differential operator for the 3D case is presented by the following expression (Sakhae-Pour *et al.* 2008a)

$$\mathfrak{I} = 1 - \mu^2 \nabla^2 \quad (9)$$

where ∇^2 is the Laplace operator, which in Cartesian coordinates is defined by $\nabla^2 = \partial^2 / x^2 + \partial^2 / y^2 + \partial^2 / z^2$ and $\mu = e_0 a$, a is the internal property length and e_0 is the material constant which is predicted by the experiment. The value of the nonlocal parameter is related to the boundary condition, the chirality, the mode shapes, the number of walls, and the nature of motions (Hosseini-Hashemi *et al.* 2013a). There is no accurate way to compute this parameter, but it is considered that the factor be obtained by conducting a comparison of dispersion curves from nonlocal elasticity and lattice dynamics of nano-material crystal structure (Hosseini-Hashemi *et al.* 2013a).

2.3 The assumptions made in the present theory

- (1) The components of displacement u and v are the axial displacements of the middle plane in x and y directions respectively, and w is the vertical displacement of the middle plane in z direction. The magnitude of the vertical displacement w is not of the same order as the thickness h of the plate and is small with respect to the plate thickness.
- (2) The axial displacements, u and v incorporate three parts:
 - A displacement part equivalent to the displacement used in the classical plate theory (CPT).
 - A displacement component owing to the shear deformation which is included via undetermined integral.
 - The shear strains in z direction are zero in the bottom and top faces of the plates.
- (1) The vertical displacement w in z direction is considered to be a function of y and x coordinates.
- (2) The nanoplate is subjected to the vertical load only.

The displacement field of the cubic shear deformation model is expressed as below (Abualnour *et al.* 2018)

$$u(x, y, z) = u_0(x, y) - z \frac{\partial w_0}{\partial x} + k_1 f(z) \int \theta(x, y) dx \quad (10a)$$

$$v(x, y, z) = v_0(x, y) - z \frac{\partial w_0}{\partial y} + k_2 f(z) \int \theta(x, y) dy \quad (10b)$$

$$w(x, y, z) = w_0(x, y) + g(z) \varphi_z(x, y) \quad (10c)$$

The coefficients k_1 and k_2 depends on the geometry. In this work, the shape function is considered based on the cubic function given by

$$f(z) = \frac{5}{4} \left(z - \frac{4z^3}{3h^2} \right) \quad (11)$$

and $u_0(x, y)$, $v_0(x, y)$, $w_0(x, y)$, $\theta(x, y)$ and $\varphi_z(x, y)$ are the five variables displacement functions of middle surface of the plate.

With the linear supposition of von-Karman strain, the displacement strain field will be as what follows

$$\begin{Bmatrix} \varepsilon_x \\ \varepsilon_y \\ \gamma_{xy} \end{Bmatrix} = \begin{Bmatrix} \varepsilon_x^0 \\ \varepsilon_y^0 \\ \gamma_{xy}^0 \end{Bmatrix} + z \begin{Bmatrix} k_x^b \\ k_y^b \\ k_{xy}^b \end{Bmatrix} + f(z) \begin{Bmatrix} k_x^s \\ k_y^s \\ k_{xy}^s \end{Bmatrix}, \quad (12)$$

$$\begin{Bmatrix} \gamma_{yz} \\ \gamma_{xz} \end{Bmatrix} = g(z) \begin{Bmatrix} \gamma_{yz}^0 \\ \gamma_{xz}^0 \end{Bmatrix}, \quad \varepsilon_z = g'(z) \varepsilon_z^0$$

$$\begin{Bmatrix} \varepsilon_x^0 \\ \varepsilon_y^0 \\ \gamma_{xy}^0 \end{Bmatrix} = \begin{Bmatrix} \frac{\partial u_0}{\partial x} \\ \frac{\partial v_0}{\partial x} \\ \frac{\partial u_0}{\partial y} + \frac{\partial v_0}{\partial x} \end{Bmatrix}, \quad \begin{Bmatrix} k_x^b \\ k_y^b \\ k_{xy}^b \end{Bmatrix} = \begin{Bmatrix} -\frac{\partial^2 w_0}{\partial x^2} \\ -\frac{\partial^2 w_0}{\partial y^2} \\ -2 \frac{\partial^2 w_0}{\partial x \partial y} \end{Bmatrix}, \quad (13a)$$

$$\begin{Bmatrix} k_x^s \\ k_y^s \\ k_{xy}^s \end{Bmatrix} = \begin{Bmatrix} k_1 \theta \\ k_2 \theta \\ k_1 \frac{\partial}{\partial y} \int \theta dx + k_2 \frac{\partial}{\partial x} \int \theta dy \end{Bmatrix},$$

$$\begin{Bmatrix} \gamma_{yz}^0 \\ \gamma_{xz}^0 \end{Bmatrix} = \begin{Bmatrix} k_2 \int \theta dy + \frac{\partial \varphi_z}{\partial y} \\ k_1 \int \theta dx + \frac{\partial \varphi_z}{\partial x} \end{Bmatrix}, \quad \varepsilon_z^0 = \varphi_z \quad (13b)$$

The integrals presented in the above equations shall be resolved by a Navier type solution and can be expressed as follows

$$\begin{aligned} \frac{\partial}{\partial y} \int \theta dx &= A' \frac{\partial^2 \theta}{\partial x \partial y}, & \frac{\partial}{\partial x} \int \theta dy &= B' \frac{\partial^2 \theta}{\partial x \partial y}, \\ \int \theta dx &= A' \frac{\partial \theta}{\partial x}, & \int \theta dy &= B' \frac{\partial \theta}{\partial y} \end{aligned} \quad (14)$$

where the coefficients A' and B' are expressed according to the type of solution employed, in this case by using Navier. Therefore, A' and B' are written as follows

$$A' = -\frac{1}{\alpha^2}, \quad B' = -\frac{1}{\beta^2}, \quad k_1 = \alpha^2, \quad k_2 = \beta^2 \quad (15)$$

where α and β are defined in expression (29).

The Hamilton's principle is utilized to determine the equation of motion. The Hamilton's principle in case of local form is obtained as what follows (Al-Basyouni *et al.* 2015, Bourada *et al.* 2015, Attia *et al.* 2015, Yahia *et al.* 2015, Bellifa *et al.* 2016, Benadouda *et al.* 2017, Zidi *et al.* 2017, Klouche *et al.* 2017, Hachemi *et al.* 2017, Fourn *et al.* 2018)

$$0 = \int_0^t \delta(U - K) dt \quad (16)$$

where δ is the variation operator, U is the strain energy, and K is the kinetic energy.

The variation of strain energy of the plate is given by

$$\begin{aligned} \delta U &= \int_V \left(\sigma_x \delta \varepsilon_x + \sigma_y \delta \varepsilon_y + \sigma_z \delta \varepsilon_z \right. \\ &\quad \left. + \tau_{xy} \delta \gamma_{xy} + \tau_{yz} \delta \gamma_{yz} + \tau_{xz} \delta \gamma_{xz} \right) dA dz \\ &= \int_A \left\{ N_x \delta \varepsilon_x^0 + N_y \delta \varepsilon_y^0 + N_z \delta \varepsilon_z^0 + N_{xy} \delta \gamma_{xy}^0 \right. \\ &\quad + M_x^b \delta k_x^b + M_y^b \delta k_y^b + M_{xy}^b \delta k_{xy}^b + M_x^s \delta k_x^s \\ &\quad \left. + M_y^s \delta k_y^s + M_{xy}^s \delta k_{xy}^s + S_{yz}^s \delta \gamma_{yz}^s + S_{xz}^s \delta \gamma_{xz}^s \right\} dA \end{aligned} \quad (17)$$

where A is the top surface and the stress resultants N , M , and S are expressed by

$$(N_i, M_i^b, M_i^s) = \int_{-h/2}^{h/2} (1, z, f) \sigma_i dz \quad (i = x, y, xy); \quad (18a)$$

$$N_z = \int_{-h/2}^{h/2} g'(z) \sigma_z dz$$

and

$$(S_{xz}^s, S_{yz}^s) = \int_{-h/2}^{h/2} g(z) (\tau_{xz}, \tau_{yz}) dz \quad (18b)$$

The variation of kinetic energy is expressed as

$$\begin{aligned} \delta K &= \int_V [\dot{u} \delta \dot{u} + \dot{v} \delta \dot{v} + \dot{w} \delta \dot{w}] \rho(z) dV \\ &= \int_A \left\{ I_0 [\dot{u}_0 \delta \dot{u}_0 + \dot{v}_0 \delta \dot{v}_0 + \dot{w}_0 \delta \dot{w}_0] \right. \\ &\quad - I_1 \left(\dot{u}_0 \frac{\partial \delta \dot{w}_0}{\partial x} + \frac{\partial \dot{w}_0}{\partial x} \delta \dot{u}_0 + \dot{v}_0 \frac{\partial \delta \dot{w}_0}{\partial y} + \frac{\partial \dot{w}_0}{\partial y} \delta \dot{v}_0 \right) \\ &\quad + J_1 \left((k_1 A)' \left(\dot{u}_0 \frac{\partial \delta \dot{\theta}}{\partial x} + \frac{\partial \dot{\theta}}{\partial x} \delta \dot{u}_0 \right) \right. \\ &\quad \left. + (k_2 B)' \left(\dot{v}_0 \frac{\partial \delta \dot{\theta}}{\partial y} + \frac{\partial \dot{\theta}}{\partial y} \delta \dot{v}_0 \right) \right) \\ &\quad + I_2 \left(\frac{\partial \dot{w}_0}{\partial x} \frac{\partial \delta \dot{w}_0}{\partial x} + \frac{\partial \dot{w}_0}{\partial y} \frac{\partial \delta \dot{w}_0}{\partial y} \right) \\ &\quad + K_2 \left((k_1 A')^2 \left(\frac{\partial \dot{\theta}}{\partial x} \frac{\partial \delta \dot{\theta}}{\partial x} \right) + (k_2 B')^2 \left(\frac{\partial \dot{\theta}}{\partial y} \frac{\partial \delta \dot{\theta}}{\partial y} \right) \right) \\ &\quad - J_2 \left((k_1 A') \left(\frac{\partial \dot{w}_0}{\partial x} \frac{\partial \delta \dot{\theta}}{\partial x} + \frac{\partial \dot{\theta}}{\partial x} \frac{\partial \delta \dot{w}_0}{\partial x} \right) \right. \\ &\quad \left. + (k_2 B') \left(\frac{\partial \dot{w}_0}{\partial y} \frac{\partial \delta \dot{\theta}}{\partial y} + \frac{\partial \dot{\theta}}{\partial y} \frac{\partial \delta \dot{w}_0}{\partial y} \right) \right) \\ &\quad \left. + J_0 (\dot{\varphi}_z \delta \dot{w}_0) + K_3 (\dot{\varphi}_z \delta \dot{\varphi}_z) \right\} dA \end{aligned} \quad (19)$$

where dot-superscript convention indicates the differentiation with respect to the time variable t ; $\rho(z)$ is the mass

density; and $(I_0, J_0, I_1, I_2, J_1, J_2, K_2, K_3)$ are mass inertias expressed as

$$(I_0, J_0, I_1, I_2) = \int_{-h/2}^{h/2} (1, g(z), z, z^2) \rho(z) dz \quad (20a)$$

$$(J_1, J_2, K_2, K_3) = \int_{-h/2}^{h/2} (f(z), z f(z), f^2(z), g^2(z)) \rho(z) dz \quad (20b)$$

Substituting the expressions for δU and δK from Eqs (18) and (19) into Eq. (20) and integrating by parts and collecting the coefficients of δu_0 , δv_0 , δw_0 , $\delta \theta$, and $\delta \varphi_z$, the following equations of motion of the plate are obtained as

$$\begin{aligned} \delta u_0 : \frac{\partial N_x}{\partial x} + \frac{\partial N_{xy}}{\partial y} &= I_0 \ddot{u}_0 - I_1 \frac{\partial \ddot{w}_0}{\partial x} + k_1 A' J_1 \frac{\partial \ddot{\theta}}{\partial x} \\ \delta v_0 : \frac{\partial N_{xy}}{\partial x} + \frac{\partial N_y}{\partial y} &= I_0 \ddot{v}_0 - I_1 \frac{\partial \ddot{w}_0}{\partial y} + k_2 B' J_1 \frac{\partial \ddot{\theta}}{\partial y} \\ \delta w_0 : \frac{\partial^2 M_x^b}{\partial x^2} + 2 \frac{\partial^2 M_{xy}^b}{\partial x \partial y} + \frac{\partial^2 M_y^b}{\partial y^2} \\ &= I_0 \ddot{w}_0 + I_1 \left(\frac{\partial \ddot{u}_0}{\partial x} + \frac{\partial \ddot{v}_0}{\partial y} \right) - I_2 \nabla^2 \ddot{w}_0 \\ &\quad + J_2 \left(k_1 A' \frac{\partial^2 \ddot{\theta}}{\partial x^2} + k_2 B' \frac{\partial^2 \ddot{\theta}}{\partial y^2} \right) + J_0 \ddot{\varphi}_z \\ \delta \theta : -k_1 M_x^s - k_2 M_y^s - (k_1 A' + k_2 B') \frac{\partial^2 M_{xy}^s}{\partial x \partial y} \\ &\quad + k_1 A' \frac{\partial S_{xz}^s}{\partial x} + k_2 B' \frac{\partial S_{yz}^s}{\partial y} \\ &= -J_1 \left(k_1 A' \frac{\partial \ddot{u}_0}{\partial x} + k_2 B' \frac{\partial \ddot{v}_0}{\partial y} \right) \\ &\quad - K_2 \left((k_1 A')^2 \frac{\partial^2 \ddot{\theta}}{\partial x^2} + (k_2 B')^2 \frac{\partial^2 \ddot{\theta}}{\partial y^2} \right) \\ &\quad + J_2 \left(k_1 A' \frac{\partial^2 \ddot{w}_0}{\partial x^2} + k_2 B' \frac{\partial^2 \ddot{w}_0}{\partial y^2} \right) \\ \delta \varphi_z : \frac{\partial S_{xz}^s}{\partial x} + \frac{\partial S_{yz}^s}{\partial y} - N_z &= J_0 \ddot{w}_0 + K_3 \ddot{\varphi}_z \end{aligned} \quad (21)$$

2.4 The nonlocal elasticity model for FG nano-plate

The constitutive relations of nonlocal theory for a FG nano-plate using Eq. (6) can be written as

$$\begin{Bmatrix} \sigma_x \\ \sigma_y \\ \sigma_z \\ \tau_{xy} \\ \tau_{yz} \\ \tau_{xz} \end{Bmatrix} - \mu \nabla^2 \begin{Bmatrix} \sigma_x \\ \sigma_y \\ \sigma_z \\ \tau_{xy} \\ \tau_{yz} \\ \tau_{xz} \end{Bmatrix} = \begin{bmatrix} C_{11} & C_{12} & C_{13} & 0 & 0 & 0 \\ C_{12} & C_{22} & C_{23} & 0 & 0 & 0 \\ C_{13} & C_{23} & C_{33} & 0 & 0 & 0 \\ 0 & 0 & 0 & C_{66} & 0 & 0 \\ 0 & 0 & 0 & 0 & C_{44} & 0 \\ 0 & 0 & 0 & 0 & 0 & C_{55} \end{bmatrix} \begin{Bmatrix} \varepsilon_x \\ \varepsilon_y \\ \varepsilon_z \\ \gamma_{xy} \\ \gamma_{yz} \\ \gamma_{xz} \end{Bmatrix} \quad (22)$$

where

$$\begin{aligned} C_{11} = C_{22} = C_{33} &= \frac{E(z)(1-\nu)}{(1-2\nu)(1+\nu)}, \\ C_{12} = C_{13} = C_{23} &= \frac{E(z)\nu}{(1-2\nu)(1+\nu)}, \\ C_{44} = C_{55} = C_{66} &= \frac{E(z)}{2(1+\nu)}, \end{aligned} \quad (23)$$

Integrating Eq. (20) over the plate's cross-section area yields the force-strain and the moment-strain of the nonlocal refined FG nano-plates as follows

$$\begin{aligned} \begin{Bmatrix} N_x \\ N_y \\ N_{xy} \\ M_x^b \\ M_y^b \\ M_{xy}^b \\ M_x^s \\ M_y^s \\ M_{xy}^s \\ N_z \end{Bmatrix} - \mu \nabla^2 \begin{Bmatrix} N_x \\ N_y \\ N_{xy} \\ M_x^b \\ M_y^b \\ M_{xy}^b \\ M_x^s \\ M_y^s \\ M_{xy}^s \\ N_z \end{Bmatrix} &= \begin{Bmatrix} A_{11} & A_{12} & 0 & B_{11} & B_{12} & 0 & B_{11}^s & B_{12}^s & 0 & X_{13} \\ A_{12} & A_{22} & 0 & B_{12} & B_{22} & 0 & B_{12}^s & B_{22}^s & 0 & X_{23} \\ 0 & 0 & A_{66} & 0 & 0 & B_{66} & 0 & 0 & B_{66}^s & 0 \\ B_{11} & B_{12} & 0 & D_{11} & D_{12} & 0 & D_{11}^s & D_{12}^s & 0 & Y_{13} \\ B_{12} & B_{22} & 0 & D_{12} & D_{22} & 0 & D_{12}^s & D_{22}^s & 0 & Y_{23} \\ 0 & 0 & B_{66} & 0 & 0 & D_{11} & 0 & 0 & D_{66}^s & 0 \\ B_{11}^s & B_{12}^s & 0 & D_{11}^s & D_{12}^s & 0 & H_{11} & H_{12} & 0 & Y_{13}^s \\ B_{12}^s & B_{22}^s & 0 & D_{12}^s & D_{22}^s & 0 & H_{12} & H_{22} & 0 & Y_{23}^s \\ 0 & 0 & B_{66}^s & 0 & 0 & D_{66}^s & 0 & 0 & H_{66}^s & 0 \\ X_{13} & X_{23} & 0 & Y_{13} & Y_{23} & 0 & Y_{13}^s & Y_{23}^s & 0 & Z_{33} \end{Bmatrix} \begin{Bmatrix} \frac{\partial u_0}{\partial x} \\ \frac{\partial v_0}{\partial y} \\ \frac{\partial u_0}{\partial y} + \frac{\partial v_0}{\partial x} \\ -\frac{\partial^2 w_0}{\partial x^2} \\ -\frac{\partial^2 w_0}{\partial y^2} \\ -2\frac{\partial^2 w_0}{\partial x \partial y} \\ k_1 \theta \\ k_2 \theta \\ (k_1 A' + k_2 B') \frac{\partial^2 \theta}{\partial x \partial y} \\ \varphi_z \end{Bmatrix} \quad (24a) \\ \begin{Bmatrix} S_{yz}^s \\ S_{xz}^s \end{Bmatrix} - \mu \nabla^2 \begin{Bmatrix} S_{yz}^s \\ S_{xz}^s \end{Bmatrix} &= \begin{Bmatrix} A_{44}^s & 0 \\ 0 & A_{55}^s \end{Bmatrix} \begin{Bmatrix} k_2 B' \frac{\partial \theta}{\partial y} + \frac{\partial \theta_z}{\partial y} \\ k_2 A' \frac{\partial \theta}{\partial x} + \frac{\partial \theta_z}{\partial x} \end{Bmatrix} \quad (24b) \end{aligned}$$

Where the cross-sectional rigidities are defined as follows

$$\begin{aligned} (A_{ij}, A_{ij}^s, B_{ij}, D_{ij}, B_{ij}^s, D_{ij}^s, H_{ij}^s) \\ = \int_{-h/2}^{h/2} C_{ij} (1, g^2(z), z, z^2, f(z), z f(z), f^2(z)) dz \end{aligned} \quad (25a)$$

$$(X_{ij}, Y_{ij}, Y_{ij}^s, Z_{ij}) = \int_{-h/2}^{h/2} (1, z, f(z), g'(z)) g'(z) C_{ij} dz \quad (25b)$$

The nonlocal equations of motion of FG nano-plates in terms of the displacement can be obtained by substituting Eqs. (24a) and (24b), into Eq. (21) as follows

$$\begin{aligned} A_{22} d_{22} v_0 + A_{66} d_{11} v_0 + (A_{12} + A_{66}) d_{12} u_0 + X_{23} d_2 \theta_z \\ - B_{22} d_{222} w_0 - (B_{12} + 2B_{66}) d_{112} w_0 \\ + (B_{66}^s (k_1 A' + k_2 B')) d_{112} \theta + (B_{22}^s k_2 + B_{12}^s k_1) d_2 \theta \\ = (1 - \mu \nabla^2) (I_0 \ddot{v}_0 - I_1 d_2 \ddot{w}_0 + J_1 B' k_2 d_2 \ddot{\theta}) \end{aligned} \quad (26a)$$

$$\begin{aligned} A_{22} d_{22} v_0 + A_{66} d_{11} v_0 + (A_{12} + A_{66}) d_{12} u_0 + X_{23} d_2 \theta_z \\ - B_{22} d_{222} w_0 - (B_{12} + 2B_{66}) d_{112} w_0 \\ + (B_{66}^s (k_1 A' + k_2 B')) d_{112} \theta + (B_{22}^s k_2 + B_{12}^s k_1) d_2 \theta \\ = (1 - \mu \nabla^2) (I_0 \ddot{v}_0 - I_1 d_2 \ddot{w}_0 + J_1 B' k_2 d_2 \ddot{\theta}) \end{aligned} \quad (26b)$$

$$\begin{aligned} B_{11} d_{111} u_0 + (B_{12} + 2B_{66}) d_{122} u_0 + (B_{12} + 2B_{66}) d_{112} v_0 \\ B_{22} d_{222} v_0 + Y_{13} d_{11} \varphi_z - D_{11} d_{1111} w_0 \\ - 2(D_{12} + 2D_{66}) d_{1112} w_0 - D_{22} d_{1112} w_0 \\ + (D_{11}^s k_1 + D_{12}^s k_2) d_{12} \theta + 2(D_{66}^s (k_1 A' + k_2 B')) d_{112} \theta \\ + (D_{12}^s k_1 + D_{22}^s k_2) d_{22} \theta \end{aligned} \quad (26c)$$

$$\begin{aligned} = (1 - \mu \nabla^2) \begin{pmatrix} I_0 \ddot{w}_0 + I_1 (d_{11} \ddot{u}_0 + d_{22} \ddot{v}_0) \\ - I_2 (d_{11} \ddot{w}_0 + d_{22} \ddot{w}_0) \\ + J_2 ((k_1 A' d_{11} \ddot{\theta} + k_2 B' d_{22} \ddot{\theta})) + J_0 \ddot{\varphi}_2 \end{pmatrix} \\ - (B_{11}^s k_1 + B_{12}^s k_2) d_{11} u_0 - (B_{66}^s (k_1 A' + k_2 B')) d_{122} u_0 \\ - (B_{66}^s (k_1 A' + k_2 B')) d_{112} v_0 - (B_{12}^s k_1 + B_{22}^s k_2) d_{22} u_0 \\ - k_1 Y_{13}^s \varphi_z - k_2 Y_{23}^s \varphi_z + (D_{11}^s k_1 + D_{12}^s k_2) d_{11} w_0 \\ + 2(D_{66}^s (k_1 A' + k_2 B')) d_{1112} w_0 + (D_{12}^s k_1 + D_{22}^s k_2) d_{22} w_0 \\ + H_{11}^s k_1^2 \theta - H_{22}^s k_2^2 \theta - 2H_{12}^s k_1 k_2 \theta \\ - ((k_1 A' + k_2 B')^2 H_{66}^s) d_{1112} \theta \\ + A_{44}^s (k_2 B')^2 d_{22} \theta + A_{55}^s (k_1 A')^2 d_{11} \theta \\ + A_{44}^s (k_2 B')^2 d_{22} \varphi_z + A_{55}^s (k_2 A')^2 d_{11} \varphi_z \end{pmatrix} \quad (26d)$$

$$\begin{aligned} = (1 - \mu \nabla^2) \begin{pmatrix} -J_1 (k_1 A' d_{11} \ddot{u}_0 + k_2 B' d_{22} \ddot{v}_0) \\ + J_2 (k_1 A' d_{11} \ddot{w}_0 + k_2 B' d_{22} \ddot{w}_0) \\ - K_2 ((k_1 A')^2 d_{11} \ddot{\theta} + (k_2 B')^2 d_{22} \ddot{\theta}) \end{pmatrix} \\ X_{13} d_{11} u_0 + X_{23} d_{22} u_0 + Z_{33} \varphi_z + Y_{13} d_{11} w_0 + Y_{23} d_{22} w_0 \\ A_{44}^s (k_2 B')^2 d_{22} \theta + A_{55}^s (k_1 A')^2 d_{11} \theta + A_{44}^s d_{22} \varphi_z + A_{55}^s d_{11} \varphi_z \\ = (1 - \mu \nabla^2) (J_0 \ddot{\varphi}_z + K_3 \ddot{w}_0), \end{aligned} \quad (26e)$$

where d_{ij} , d_{ijl} and d_{ijlm} are the following differential operators

$$\begin{aligned} d_{ij} &= \frac{\partial^2}{\partial x_i \partial x_j}, & d_{ijl} &= \frac{\partial^3}{\partial x_i \partial x_j \partial x_l}, \\ d_{ijlm} &= \frac{\partial^4}{\partial x_i \partial x_j \partial x_l \partial x_m}, & d_i &= \frac{\partial}{\partial x_i}, \quad (i, j, l, m = 1, 2). \end{aligned} \quad (27)$$

3. Solution procedures

Here, based on the Navier type procedure, an analytical solution of the governing equations for dynamic of a simply supported FG nanoplate is presented. The displacement functions are written as product of undetermined coefficients and known trigonometric functions to respect the governing equations and the conditions at $x = 0, a$ and $y = 0, b$. The following displacement fields are assumed to be of the form

$$\begin{Bmatrix} u_0 \\ v_0 \\ w_0 \\ \theta \\ \varphi_z \end{Bmatrix} = \sum_{m=1}^{\infty} \sum_{n=1}^{\infty} \begin{Bmatrix} U_{mn} e^{i\omega t} \cos(\alpha x) \sin(\beta y) \\ V_{mn} e^{i\omega t} \sin(\alpha x) \cos(\beta y) \\ W_{mn} e^{i\omega t} \sin(\alpha x) \sin(\beta y) \\ X_{mn} e^{i\omega t} \sin(\alpha x) \sin(\beta y) \\ Y_{mn} e^{i\omega t} \sin(\alpha x) \sin(\beta y) \end{Bmatrix} \quad (28)$$

where $(U_{mn}, V_{mn}, W_{mn}, X_{mn}, Y_{mn})$ are the unknown Fourier coefficients.
with

$$\alpha = m\pi/a \quad \text{and} \quad \beta = n\pi/b \quad (29)$$

Inserting Eq. (28) into Eqs. (26), leads to

$$\begin{pmatrix} \begin{bmatrix} S_{11} & S_{12} & S_{13} & S_{14} & S_{15} \\ S_{12} & S_{22} & S_{23} & S_{24} & S_{25} \\ S_{13} & S_{23} & S_{33} & S_{34} & S_{35} \\ S_{14} & S_{24} & S_{34} & S_{44} & S_{45} \\ S_{15} & S_{25} & S_{35} & S_{45} & S_{55} \end{bmatrix} \\ -\lambda \omega^2 \begin{bmatrix} M_{11} & 0 & M_{13} & M_{14} & 0 \\ 0 & M_{22} & M_{23} & M_{24} & 0 \\ M_{13} & M_{23} & M_{33} & M_{34} & M_{35} \\ M_{14} & M_{24} & M_{34} & M_{44} & 0 \\ 0 & 0 & M_{35} & 0 & M_{55} \end{bmatrix} \end{pmatrix} \begin{Bmatrix} U_{mn} \\ V_{mn} \\ W_{mn} \\ X_{mn} \\ Y_{mn} \end{Bmatrix} = \begin{Bmatrix} 0 \\ 0 \\ 0 \\ 0 \\ 0 \end{Bmatrix} \quad (30)$$

$$\begin{aligned} S_{11} &= -(A_{11}\alpha^2 + A_{66}\beta^2), \\ S_{12} &= -\alpha\beta (A_{12} + A_{66}), \\ S_{13} &= \alpha(B_{11}\alpha^2 + B_{12}\beta^2 + 2B_{66}\beta^2), \\ S_{14} &= \alpha(k_1 B_{11}^s + k_2 B_{12}^s - (k_1 A' + k_2 B') B_{66}^s \alpha^2), \\ S_{15} &= X_{13} \alpha \quad S_{11} = -(A_{11}\alpha^2 + A_{66}\beta^2), \\ S_{22} &= -(A_{66}\alpha^2 + A_{22}\beta^2), \\ S_{23} &= \beta(B_{22}\beta^2 + B_{12}\alpha^2 + 2B_{66}\alpha^2), \\ S_{24} &= \beta(k_2 B_{22}^s + k_1 B_{12}^s - (k_1 A' + k_2 B') B_{66}^s \alpha^2) \\ S_{25} &= X_{23} \beta \\ S_{33} &= -(D_{11}\alpha^4 + 2(D_{12} + 2D_{66})\alpha^2 \beta^2 + D_{22}\beta^4), \\ S_{34} &= -k_1(D_{11}^s \alpha^2 + D_{12}^s \beta^2) \\ &\quad + 2(k_1 A' + k_2 B') D_{66}^s \alpha^2 \beta^2 \\ &\quad - k_2(D_{22}^s \beta^2 + D_{12}^s \alpha^2) \\ S_{35} &= -(Y_{13})\alpha^2 - (Y_{23})\beta^2 \\ S_{44} &= -k_1(H_{11}^s k_1 + H_{12}^s k_2) - (k_1 A' + k_2 B')^2 H_{66}^s \alpha^2 \beta^2 \\ &\quad - k_2(H_{12}^s k_1 + H_{22}^s k_2) - (k_1 A')^2 A_{55}^s \alpha^2 \\ &\quad - (k_2 B')^2 A_{44}^s \beta^2 \\ S_{45} &= -(k_1 A') A_{55}^s \alpha^2 - (k_2 B') A_{44}^s \beta^2 + k_1 Y_{13}^s + k_2 Y_{23}^s \end{aligned} \quad (31)$$

$$\begin{aligned} S_{55} &= -(A_{55}^s)\alpha^2 - (A_{44}^s)\beta^2 - Z_{33} \\ M_{11} &= -I_0, \quad M_{13} = \alpha I_1, \quad M_{14} = -k_1 J_1 A', \\ M_{15} &= 0, \quad M_{22} = -I_0, \quad M_{23} = \beta I_1, \\ M_{24} &= -k_2 B' \beta J_1, \quad M_{25} = 0 \\ M_{33} &= -I_0 - I_2(\alpha^2 + \beta^2), \\ M_{34} &= J_2(k_1 A' \alpha^2 + k_2 B' \beta^2), \quad M_{35} = -J_0, \\ M_{44} &= -K_2((k_1 A')^2 \alpha^2 + (k_2 B')^2 \beta^2), \quad M_{45} = 0 \\ M_{55} &= -K_3, \quad \lambda = (1 + \mu(\alpha^2 + \beta^2)) \end{aligned} \quad (31)$$

4. Numerical results and discussions

In this work, two separate parts are considered; in the first part, have been examined and validated isotropic rectangular nano-plate, and in the second part, it does for FG one.

4.1 Isotropic rectangular nano-plate

Only homogeneous plate ($n = 0$) is employed in this part for the verification.

Tables 2-4 provide the first three non-dimensional frequency and Frequency Ratios (FR) for simply supported boundary condition with different values of aspect ratio ($\eta = b/a$), specified values of non-dimensional scale parameter ($\zeta = \mu/a$) and the thickness to length ratio $h/a = 0.1$ on rectangular nano-plates. The natural frequency parameters written in non-dimensional form $\beta = \omega a^2 \sqrt{\rho h/D}$, $D = Eh^3 / 12(1 - \nu^2)$ are the flexural rigidity. The nano-plate is made of the following material properties: $E = 210$ GPa, $\nu = 0.3$ and $\rho = 7800$ (kg/m³). The computed frequencies based on the proposed nonlocal cubic shear deformation theory are compared with those given by Hosseini-Hashemi *et al.* (2013b) based on Mindlin Plate Theory (MPT) and those reported by Khorshidi *et al.* (2015) based on exponential shear deformation theory. Also, the Frequency Ratio (FR) expression between the nonlocal and local non-dimensional frequencies is given as what follows

$$FR = \frac{\beta^{NL}}{\beta^L} \quad (32)$$

where β^{NL} is the non-dimensional nonlocal frequency parameter, and β^L is the non-dimensional local frequency parameter.

It can be seen from Tables 2-4, that the obtained values for non-dimensional nonlocal frequency parameter β^{NL} are in good agreement with those provided by Khorshidi *et al.* (2015) and Hosseini-Hashemi *et al.* (2013b). The introduction of stretching thickness effect makes the nanoplate more stiffness.

4.2 FGM plate

Table 5 presents a comparison of the frequency parameters $\bar{\beta} = \omega h \sqrt{\rho_c/E_c}$ for AL/AL₂O₃ square moderately thick plates with those provided by Hosseini-

Table 2 The variations of the non-dimensional frequency ($\beta = \omega a^2 \sqrt{\rho h/D}$) and the frequency ratio (FR) for the nonlocal plate ($m = 1, n = 1$)

Method		$\zeta = 0$ $\zeta = 0.2$ $\zeta = 0.4$ $\zeta = 0.6$ $\zeta = 0.8$					
		β^{NL}	FR	FR	FR	FR	FR
$\eta = 0.6$	Present ($\varepsilon_z \neq 0$)	35.0858	1.0000	0.6335	0.3789	0.2633	0.2005
	Present ($\varepsilon_z = 0$)	35.0045	1.0000	0.6335	0.3789	0.2633	0.2005
	Khorshidi <i>et al.</i> (2015)	35.015	1.0000	0.6335	0.3789	0.2633	0.2005
	Hosseini-Hashemi <i>et al.</i> (2013b)	35.0643	1.0000	0.6335	0.3789	0.2633	0.2005
$\eta = 0.8$	Present ($\varepsilon_z \neq 0$)	24.2431	1.0000	0.7051	0.4451	0.3146	0.2412
	Present ($\varepsilon_z = 0$)	24.2034	1.0000	0.7051	0.4451	0.3146	0.2412
	Khorshidi <i>et al.</i> (2015)	24.2084	1.0000	0.7051	0.4451	0.3146	0.2412
	Hosseini-Hashemi <i>et al.</i> (2013b)	24.2330	1.0000	0.7050	0.4451	0.3146	0.2412
$\eta = 1$	Present ($\varepsilon_z \neq 0$)	19.0902	1.0000	0.7475	0.4904	0.3512	0.2708
	Present ($\varepsilon_z = 0$)	19.0653	1.0000	0.7475	0.4904	0.3512	0.2708
	Khorshidi <i>et al.</i> (2015)	19.0684	1.0000	0.7475	0.4904	0.3512	0.2708
	Hosseini-Hashemi <i>et al.</i> (2013b)	19.0840	1.0000	0.7475	0.4904	0.3512	0.2708

Table 3 The variations of the non-dimensional frequency ($\beta = \omega a^2 \sqrt{\rho h/D}$) and the frequency ratio (FR) for the nonlocal plate ($m = 2, n = 1$)

Method		$\zeta = 0$ $\zeta = 0.2$ $\zeta = 0.4$ $\zeta = 0.6$ $\zeta = 0.8$					
		β^{NL}	FR	FR	FR	FR	FR
$\eta = 0.6$	Present ($\varepsilon_z \neq 0$)	60.3530	1.0000	0.5216	0.2923	0.1997	0.1511
	Present ($\varepsilon_z = 0$)	60.1243	1.0000	0.5216	0.2923	0.1997	0.1511
	Khorshidi <i>et al.</i> (2015)	60.1556	1.0000	0.5216	0.2923	0.1997	0.1511
	Hosseini-Hashemi <i>et al.</i> (2013b)	60.2869	1.0000	0.5216	0.2923	0.1997	0.1511
$\eta = 0.8$	Present ($\varepsilon_z \neq 0$)	50.3554	1.0000	0.5594	0.3197	0.2194	0.1663
	Present ($\varepsilon_z = 0$)	50.1930	1.0000	0.5594	0.3197	0.2194	0.1663
	Khorshidi <i>et al.</i> (2015)	50.2147	1.0000	0.5594	0.3197	0.2194	0.1663
	Hosseini-Hashemi <i>et al.</i> (2013b)	50.3100	1.0000	0.5594	0.3197	0.2194	0.1664
$\eta = 1$	Present ($\varepsilon_z \neq 0$)	45.6216	1.0000	0.5799	0.3353	0.2308	0.1752
	Present ($\varepsilon_z = 0$)	45.4869	1.0000	0.5799	0.3353	0.2308	0.1752
	Khorshidi <i>et al.</i> (2015)	45.5048	1.0000	0.5799	0.3353	0.2308	0.1752
	Hosseini-Hashemi <i>et al.</i> (2013b)	45.5845	1.0000	0.5799	0.3353	0.2308	0.1752

Table 4 The variations of the non-dimensional frequency ($\beta = \omega a^2 \sqrt{\rho h/D}$) and the frequency ratio (FR) for the nonlocal plate ($m = 2, n = 2$)

Method		$\zeta = 0 \qquad \zeta = 0.2 \qquad \zeta = 0.4 \qquad \zeta = 0.6 \qquad \zeta = 0.8$					
		β^{NL}	FR	FR	FR	FR	FR
$\eta = 0.6$	Present ($\varepsilon_z \neq 0$)	122.0595	1.0000	0.3789	0.2005	0.1352	0.1018
	Present ($\varepsilon_z = 0$)	121.2246	1.0000	0.3789	0.2005	0.1352	0.1018
	Khorshidi <i>et al.</i> (2015)	121.356	1.0000	0.3789	0.2005	0.1352	0.1018
	Hosseini-Hashemi <i>et al.</i> (2013b)	121.7770	1.0000	0.3789	0.2006	0.1352	0.1018
$\eta = 0.8$	Present ($\varepsilon_z \neq 0$)	87.3788	1.0000	0.4451	0.2412	0.1635	0.1233
	Present ($\varepsilon_z = 0$)	86.9235	1.0000	0.4451	0.2412	0.1635	0.1233
	Khorshidi <i>et al.</i> (2015)	86.9898	1.0000	0.4451	0.2412	0.1635	0.1233
	Hosseini-Hashemi <i>et al.</i> (2013b)	87.2357	1.0000	0.4451	0.2412	0.1635	0.1233

Table 4 Continued

	Method	$\zeta = 0$ $\zeta = 0.2$ $\zeta = 0.4$ $\zeta = 0.6$ $\zeta = 0.8$					
		β^{NL}	FR	FR	FR	FR	FR
$\eta = 1$	Present ($\varepsilon_z \neq 0$)	70.1122	1.0000	0.4904	0.2708	0.1843	0.1393
	Present ($\varepsilon_z = 0$)	69.8093	1.0000	0.4904	0.2708	0.1843	0.1393
	Khorshidi <i>et al.</i> (2015)	69.8517	1.0000	0.4904	0.2708	0.1843	0.1393
	Hosseini-Hashemi <i>et al.</i> (2013b)	70.0219	1.0000	0.4904	0.2708	0.1844	0.1393

Table 5 The comparison of the natural frequency parameter ($\bar{\beta} = \omega h \sqrt{\rho_c h / E_c}$) for AL/AL₂O₃ square plates ($\eta = 1$)

h/a	(m, n)	Method	n				
			0	0.5	1	4	10
0.05	(1, 1)	Present ($\varepsilon_z \neq 0$)	0.0148	0.0126	0.0115	0.0100	0.0095
		Present ($\varepsilon_z = 0$)	0.0148	0.0125	0.0113	0.0098	0.0094
		Khorshidi <i>et al.</i> (2015)	0.0148	0.0125	0.0113	0.0098	0.0094
		Hosseini-Hashemi <i>et al.</i> (2010)	0.0148	0.0128	0.0115	0.0101	0.0096
		Zhao <i>et al.</i> (2009)	0.0146	0.0124	0.0112	0.0097	0.0093
0.1	(1, 1)	Present ($\varepsilon_z \neq 0$)	0.0578	0.0494	0.0449	0.0389	0.0368
		Present ($\varepsilon_z = 0$)	0.0577	0.0490	0.0442	0.0381	0.0364
		Khorshidi <i>et al.</i> (2015)	0.0577	0.0490	0.0442	0.0381	0.0364
		Matsunaga (2008)	0.0577	0.0492	0.0443	0.0381	0.0364
		Hosseini-Hashemi <i>et al.</i> (2010)	0.0577	0.0492	0.0445	0.0383	0.0363
		Zhao <i>et al.</i> (2009)	0.0568	0.0482	0.0435	0.0376	0.3592
	(1, 2)	Present ($\varepsilon_z \neq 0$)	0.1381	0.1184	0.1077	0.0923	0.0868
		Present ($\varepsilon_z = 0$)	0.1376	0.1174	0.1059	0.0903	0.0856
		Khorshidi <i>et al.</i> (2015)	0.1377	0.1174	0.1059	0.0902	0.0856
		Matsunaga (2008)	0.1381	0.1180	0.1063	0.0904	0.0859
		Zhao <i>et al.</i> (2009)	0.1354	0.1154	0.1042	-	0.085
	(2, 2)	Present ($\varepsilon_z \neq 0$)	0.2122	0.1825	0.1660	0.1409	0.1318
		Present ($\varepsilon_z = 0$)	0.2113	0.1807	0.1631	0.1378	0.1301
		Khorshidi <i>et al.</i> (2015)	0.2114	0.1808	0.1632	0.1377	0.1300
		Matsunaga (2008)	0.2121	0.1819	0.1640	0.1383	0.1306
		Zhao <i>et al.</i> (2009)	0.2063	0.1764	0.1594	-	0.1289
0.2	(1, 1)	Present ($\varepsilon_z \neq 0$)	0.2122	0.1825	0.1660	0.1409	0.1318
		Present ($\varepsilon_z = 0$)	0.2113	0.1807	0.1631	0.1378	0.1301
		Khorshidi <i>et al.</i> (2015)	0.2114	0.1808	0.1632	0.1377	0.1300
		Matsunaga (2008)	0.2121	0.1819	0.1640	0.1383	0.1306
		Hosseini-Hashemi <i>et al.</i> (2010)	0.2112	0.1806	0.1650	0.1371	0.1304
		Zhao <i>et al.</i> (2009)	0.2055	0.1757	0.1587	0.1356	0.1284
	(1, 2)	Present ($\varepsilon_z \neq 0$)	0.4660	0.4042	0.3677	0.3047	0.2812
		Present ($\varepsilon_z = 0$)	0.4623	0.3987	0.3607	0.2980	0.2771
		Khorshidi <i>et al.</i> (2015)	0.4629	0.3993	0.3611	0.2976	0.2772
		Matsunaga (2008)	0.4658	0.4040	0.3644	0.3000	0.2790
	(2, 2)	Present ($\varepsilon_z \neq 0$)	0.6760	0.5893	0.5365	0.4381	0.4009
		Present ($\varepsilon_z = 0$)	0.6691	0.5807	0.5254	0.4284	0.3948
		Khorshidi <i>et al.</i> (2015)	0.6691	0.5807	0.5254	0.4280	0.3947
		Matsunaga (2008)	0.6753	0.5891	0.5444	0.4362	0.3981

Table 6 The comparison of the fundamental frequency parameter ($\bar{\beta} = \omega h \sqrt{\rho_c h / E_c}$) for AL/ZrO₂ square plates ($\eta = 1$)

Method	$n=0$			$n=1$		$\delta=0.2$		
	$\delta = \frac{1}{\sqrt{10}}$	$\delta=0.1$	$\delta=0.05$	$\delta=0.1$	$\delta=0.2$	$n=2$	$n=3$	$n=5$
Present $\varepsilon_z \neq 0$	0.5424	0.0672	0.0160	0.0624	0.2300	0.2285	0.2290	0.2295
Present $\varepsilon_z = 0$	0.5380	0.0671	0.0158	0.0619	0.2277	0.2257	0.2263	0.2272
Khorshidi <i>et al.</i> (2015)	0.4629	0.0577	0.0158	0.0619	0.2278	0.2288	0.2301	0.2327
Matsunaga (2008)	0.4658	0.0577	0.0158	0.0619	0.2285	0.2264	0.2270	0.2281
Vel and Batra (2004)	0.4658	0.0577	0.0153	0.0596	0.2192	0.2197	0.2211	0.2225
HSDT ^(a)	0.4658	0.0578	0.0157	0.0613	0.2257	0.2237	0.2243	0.2253
FSDT ^(a)	0.4619	0.0577	0.0162	0.0633	0.2333	0.2325	0.2334	0.2334
Hosseini-Hashemi <i>et al.</i> (2010)	0.4618	0.0576	0.0158	0.0611	0.2270	0.2249	0.2254	0.2265

(a) Pradyumna and Bandyopadhyay (2008)

Table 7 The frequency parameter ($\beta = \omega a^2 \sqrt{\rho_c h / E_c}$) for AL/ZrO₂ plates ($\delta = 0.2, n = 1$)

$\frac{a}{b}$	2	1.5	1	2/3	0.5
Present $\varepsilon_z \neq 0$	3.2091	3.6702	4.9411	7.5878	10.9096
Present $\varepsilon_z = 0$	3.1796	3.6354	4.8909	7.5005	10.7682
Khorshidi <i>et al.</i> (2015)	3.1198	3.3720	4.9325	6.9551	9.9853

Hashemi *et al.* (2010), Zhao *et al.* (2009), Khorshidi *et al.* (2015) and Matsunaga (2008) when $n = 0, 0.5, 1, 4$ and 10. In addition, the corresponding mode shapes m and n , representing the number of half-waves in the x and y directions, respectively, are given for any of the frequency parameters $\bar{\beta}$.

In Table 6, a comparison of the results ($\bar{\beta} = \omega h \sqrt{\rho_m / E_m}$) for AL/ZrO₂ square plates with those of 2D HSDT (Matsunaga 2008), 3D theory by using the power series procedure (Vel and Batra 2004), finite element HSDT method (Pradyumna and Bandyopadhyay 2008), finite element FSDT method (Hosseini-Hashemi *et al.* 2008), an analytical FSDT solution (Hosseini-Hashemi *et al.* 2010) and HSDT solution Khorshidi *et al.* (2015) is demonstrated. From Tables 5 and 6, it can be confirmed that there is a very good agreement among the results confirming the high accuracy of the proposed analytical formulation. The effect of the geometric ratio $\eta = b/a$ on the frequency parameters $\beta = \omega a^2 \sqrt{\rho_c h / E_c}$ of a rectangular Al/ZrO₂ plate ($\delta = h/a = 0.2, n = 1$) is shown in Table 7.

From Table 7, it can be deduced that with a reduction in the aspect ratio, the frequency parameter increases due to the increase of the stiffness of the plate. It can be also observed that the stretching effect increases the frequency parameter.

In Table 8, the influences of different parameters on the non-dimensional frequencies of the rectangular FG nanoplate are presented. From these results, it is found that by increasing the scale parameter, the rate of variation of non-dimensional frequencies diminishes, because by

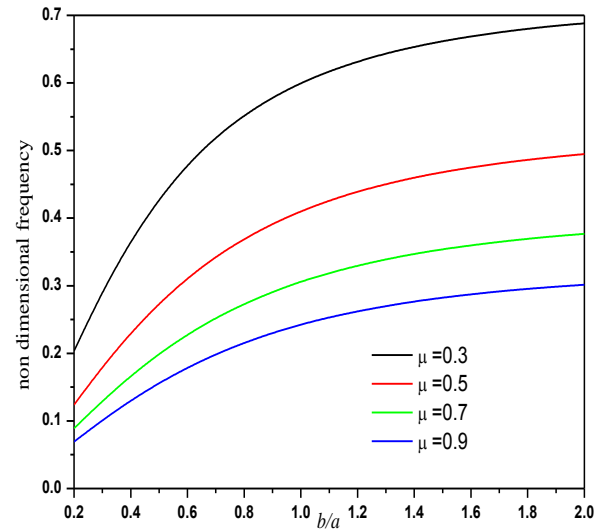


Fig. 2 The influences of the aspect ratio and the scale parameter on the non-dimensional frequency

increasing the scale parameter, the strain energy diminishes, and it causes a reduction of the rigidity of the plates.

In Fig. 2, the influences of the aspect ratio and the scale parameter on the non-dimensional frequency of the rectangular nanoscale plates are illustrated. It is demonstrated that with an increase in the ratio b/a , the non-dimensional frequency increases. It is observed that for the lower ratios of b/a , the effect of the scale parameters diminishes.

In Fig. 3, the influences of the scale parameter on the frequency ratio of the nano-plates are demonstrated for different modes of vibration. From these results, it seems that the frequency ratios for the lower modes are more than those for the higher modes.

Fig. 4 demonstrates the influence of the gradient index on the dimensionless two first frequencies of FG nano-plate (SUS304/ Si₃N₄) with $a/h = 10$ for different values of the small scale parameter. It can be observed that the dimensionless frequency diminishes as the gradient index increases. This is due to the fact that an increase in the

Table 8 The effect of the non-dimensional nonlocal parameter ζ and the gradient index n on the non dimensional frequencies $\bar{\beta} = \omega h \sqrt{\rho_c h / E_c}$ of the rectangular FG nanoplate (AL/AL₂O₃)

ζ	$\frac{a}{b}$	$\frac{h}{a}$	Method	Gradient index		
				0	5	10
0.0	0.5	0.2	Present $\varepsilon_z \neq 0$	0.1381	0.0909	0.0868
			Present $\varepsilon_z = 0$	0.1376	0.0891	0.0856
			Khorshidi <i>et al.</i> (2015)	0.2114	0.1357	0.0856
		0.1	Present $\varepsilon_z \neq 0$	0.0365	0.0244	0.0234
			Present $\varepsilon_z = 0$	0.0365	0.0239	0.0231
			Khorshidi <i>et al.</i> (2015)	0.0365	0.0239	0.0231
	1.0	0.2	Present $\varepsilon_z \neq 0$	0.2122	0.1386	0.1318
			Present $\varepsilon_z = 0$	0.2113	0.1358	0.1301
			Khorshidi <i>et al.</i> (2015)	0.2310	0.1356	0.1300
		0.1	Present $\varepsilon_z \neq 0$	0.0578	0.0384	0.0368
			Present $\varepsilon_z = 0$	0.0577	0.0377	0.0364
			Khorshidi <i>et al.</i> (2015)	0.0577	0.0377	0.0364
0.1	0.5	0.2	Present $\varepsilon_z \neq 0$	0.1306	0.0858	0.0819
			Present $\varepsilon_z = 0$	0.1299	0.0841	0.0808
			Khorshidi <i>et al.</i> (2015)	0.1299	0.1239	0.0808
		0.1	Present $\varepsilon_z \neq 0$	0.0345	0.0230	0.0221
			Present $\varepsilon_z = 0$	0.0345	0.0226	0.0218
			Khorshidi <i>et al.</i> (2015)	0.0345	0.0226	0.0218
	1.0	0.2	Present $\varepsilon_z \neq 0$	0.1939	0.1266	0.1205
			Present $\varepsilon_z = 0$	0.1931	0.1241	0.1189
			Khorshidi <i>et al.</i> (2015)	0.1932	0.1239	0.1188
		0.1	Present $\varepsilon_z \neq 0$	0.0528	0.0351	0.0337
			Present $\varepsilon_z = 0$	0.0527	0.0344	0.0332
			Khorshidi <i>et al.</i> (2015)	0.0527	0.0344	0.0332
0.2	0.5	0.2	Present $\varepsilon_z \neq 0$	0.1130	0.0744	0.0710
			Present $\varepsilon_z = 0$	0.1126	0.0730	0.0701
			Khorshidi <i>et al.</i> (2015)	0.1127	0.0728	0.0700
		0.1	Present $\varepsilon_z \neq 0$	0.0299	0.0199	0.0191
			Present $\varepsilon_z = 0$	0.0299	0.0196	0.0189
			Khorshidi <i>et al.</i> (2015)	0.0299	0.0196	0.0189
	1.0	0.2	Present $\varepsilon_z \neq 0$	0.1586	0.1036	0.0985
			Present $\varepsilon_z = 0$	0.1579	0.1015	0.0972
			Khorshidi <i>et al.</i> (2015)	0.1580	0.1014	0.0972
		0.1	Present $\varepsilon_z \neq 0$	0.0432	0.0287	0.0275
			Present $\varepsilon_z = 0$	0.0431	0.0282	0.0272
			Khorshidi <i>et al.</i> (2015)	0.0431	0.0282	0.0272
0.3	0.5	0.2	Present $\varepsilon_z \neq 0$	0.0950	0.0626	0.0597
			Present $\varepsilon_z = 0$	0.0948	0.0613	0.0589
			Khorshidi <i>et al.</i> (2015)	0.0948	0.0613	0.0589
		0.1	Present $\varepsilon_z \neq 0$	0.0252	0.0168	0.0161
			Present $\varepsilon_z = 0$	0.0251	0.0165	0.0159
			Khorshidi <i>et al.</i> (2015)	0.0251	0.0165	0.0159

Table 8 Continued

ζ	$\frac{a}{b}$	$\frac{h}{a}$	Method	Gradient index		
				0	5	10
0.3	1.0	0.2	Present $\varepsilon_z \neq 0$	0.1273	0.0831	0.0791
			Present $\varepsilon_z = 0$	0.1268	0.0815	0.0781
			Khorshidi <i>et al.</i> (2015)	0.1269	0.0814	0.0780
		0.1	Present $\varepsilon_z \neq 0$	0.0347	0.0231	0.0221
			Present $\varepsilon_z = 0$	0.0346	0.0226	0.0218
			Khorshidi <i>et al.</i> (2015)	0.0346	0.0226	0.0218
0.4	0.5	0.2	Present $\varepsilon_z \neq 0$	0.0801	0.0527	0.0503
			Present $\varepsilon_z = 0$	0.0798	0.0517	0.0497
			Khorshidi <i>et al.</i> (2015)	0.0798	0.0516	0.0496
		0.1	Present $\varepsilon_z \neq 0$	0.0212	0.0142	0.0136
			Present $\varepsilon_z = 0$	0.0212	0.0139	0.0134
			Khorshidi <i>et al.</i> (2015)	0.0212	0.0139	0.0134
	1.0	0.2	Present $\varepsilon_z \neq 0$	0.1040	0.0679	0.0646
			Present $\varepsilon_z = 0$	0.1036	0.0666	0.0638
			Khorshidi <i>et al.</i> (2015)	0.1037	0.0665	0.0638
		0.1	Present $\varepsilon_z \neq 0$	0.0283	0.0189	0.0181
			Present $\varepsilon_z = 0$	0.0283	0.0185	0.0178
			Khorshidi <i>et al.</i> (2015)	0.0283	0.0185	0.0178

gradient index leads to a decrease in the stiffness of the FG nano-plate.

5. Conclusions

The size-dependent dynamic properties of FG nano-plate are analytically studied by using a simple cubic refined

plate model based on the nonlocal differential constitutive relations of Eringen. The kinematic of the present theory is modified by considering undetermined integral terms in in-plane displacements which results in a reduced number of variables compared with other HSDT of the same order. Comparing the obtained results with those found in the literature for FG nano-plates demonstrates a high stability and accuracy of the present solution. What presented herein

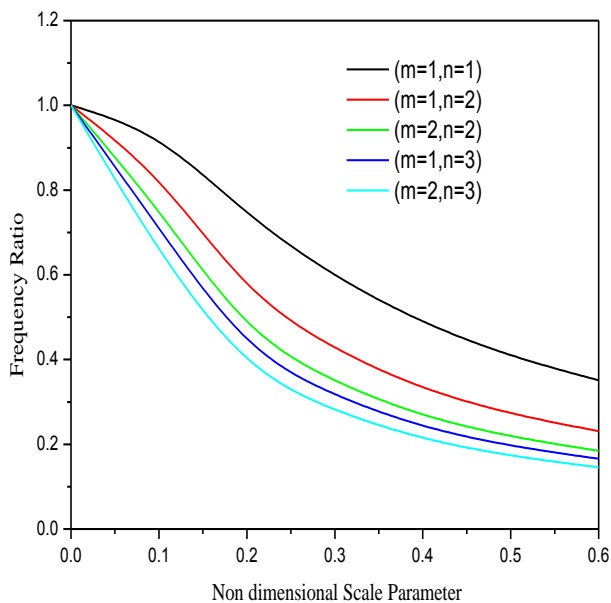


Fig. 3 The effects of the aspect ratio and the nonlocal parameter on the non-dimensional frequency

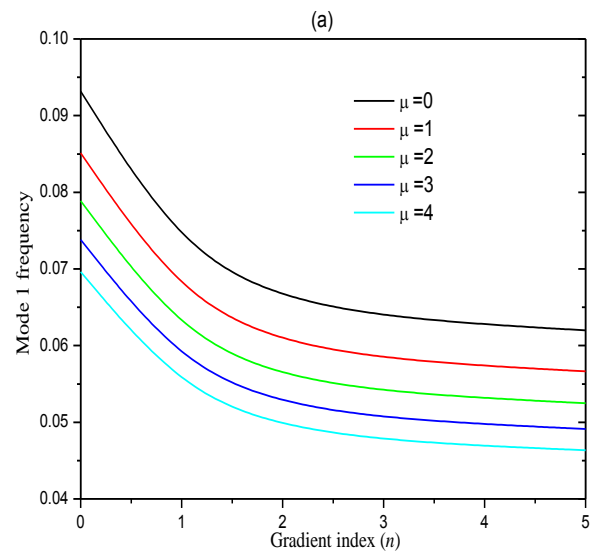


Fig. 4 Influence of the gradient index (n) and the scale parameter (μ) on dimensionless frequency for a simply supported square FG plate with $a/h = 10$: (a) first frequency; (b) second frequency

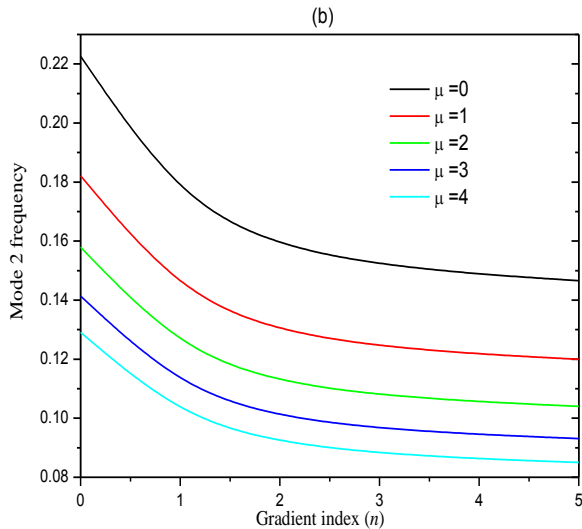


Fig. 4 Continued

demonstrates the influences of the variations of the scale parameter, the ratio of the thickness to the length, the gradient indexes and the aspect ratio on the frequency values of a FG nano-plate. It is demonstrated that the frequency ratio diminishes with increasing the mode number and the value of the scale parameter, and also increasing the gradient index causes the non-dimensional frequencies to decrease.

References

- Aagesen, M. and Sorensen, C. (2008), "Nanoplates and their suitability for use as solar cells", *Proceedings of Clean Technol.*, 109-112.
- Abdelaziz, H.H., Meziane, M.A.A., Bousahla, A.A., Tounsi, A., Mahmoud, S.R. and Alwabli, A.S. (2017), "An efficient hyperbolic shear deformation theory for bending, buckling and free vibration of FGM sandwich plates with various boundary conditions", *Steel Compos. Struct., Int. J.*, **25**(6), 693-704.
- Abualnour, M., Houari, M.S.A., Tounsi, A., Adda Bedia, E.A. and Mahmoud, S.R. (2018), "A novel quasi-3D trigonometric plate theory for free vibration analysis of advanced composite plates", *Compos. Struct.*, **184**, 688-697.
- Adda Bedia, W., Houari, M.S.A., Bessaim, A., Bousahla, A.A., Tounsi, A., Saeed, T. and Alhodaly, M.S. (2019), "A new hyperbolic two-unknown beam model for bending and buckling analysis of a nonlocal strain gradient nanobeams", *J. Nano Res.*, **57**, 175-191.
- Ahouel, M., Houari, M.S.A., Adda Bedia, E.A. and Tounsi, A. (2016), "Size-dependent mechanical behavior of functionally graded trigonometric shear deformable nanobeams including neutral surface position concept", *Steel Compos. Struct., Int. J.*, **20**(5), 963-981.
- Aifantis, E. (1999), "Strain gradient interpretation of size effects", *Int. J. Fract.*, **95**, 299-314.
- Akbaş, Ş.D. (2016), "Forced vibration analysis of viscoelastic nanobeams embedded in an elastic medium", *Smart Struct. Syst., Int. J.*, **18**(6), 1125-1143.
- Akbas, S.D. (2018), "Forced vibration analysis of cracked functionally graded microbeams", *Adv. Nano Res., Int. J.*, **6**(1), 39-55.
- Al-Basyouni, K.S., Tounsi, A. and Mahmoud, S.R. (2015), "Size dependent bending and vibration analysis of functionally graded micro beams based on modified couple stress theory and neutral surface position", *Compos. Struct.*, **125**, 621-630.
- Alshorbagy, A.E., Eltaher, M.A. and Mahmoud, F.F. (2011), "Free vibration characteristics of a functionally graded beam by finite element method", *Appl. Math. Model.*, **35**(1), 412-425.
- Asghari, M. and Taati, E. (2013), "A size-dependent model for functionally graded micro-plates for mechanical analyses", *J. Vib. Cont.*, **19**, 1614-1632.
- Atmane, H.A., Tounsi, A. and Bernard, F. (2017), "Effect of thickness stretching and porosity on mechanical response of a functionally graded beams resting on elastic foundations", *Int. J. Mech. Mater. Des.*, **13**(1), 71-84.
- Attia, A., Tounsi, A., Adda Bedia, E.A. and Mahmoud, S.R. (2015), "Free vibration analysis of functionally graded plates with temperature-dependent properties using various four variable refined plate theories", *Steel Compos. Struct., Int. J.*, **18**(1), 187-212.
- Attia, A., Bousahla, A.A., Tounsi, A., Mahmoud, S.R. and Alwabli, A.S. (2018), "A refined four variable plate theory for thermoelastic analysis of FGM plates resting on variable elastic foundations", *Struct. Eng. Mech., Int. J.*, **65**(4), 453-464.
- Bakhadda, B., Bachir Bouiadja, M., Bourada, F., Bousahla, A.A., Tounsi, A. and Mahmoud, S.R. (2018), "Dynamic and bending analysis of carbon nanotube-reinforced composite plates with elastic foundation", *Wind Struct., Int. J.*, **27**(5), 311-324.
- Becheri, T., Amara, K., Bouazza, M. and Benseddig, N. (2016), "Buckling of symmetrically laminated plates using nth-order shear deformation theory with curvature effects", *Steel Compos. Struct., Int. J.*, **21**(6), 1347-1368.
- Belabed, Z., Houari, M.S.A., Tounsi, A., Mahmoud, S.R. and Bég, O.A. (2014), "An efficient and simple higher order shear and normal deformation theory for functionally graded material (FGM) plates", *Compos. Part B*, **60**, 274-283.
- Belabed, Z., Bousahla, A.A., Houari, M.S.A., Tounsi, A. and Mahmoud, S.R. (2018), "A new 3-unknown hyperbolic shear deformation theory for vibration of functionally graded sandwich plate", *Earthq. Struct., Int. J.*, **14**(2), 103-115.
- Beldjelili, Y., Tounsi, A. and Mahmoud, S.R. (2016), "Hygro-thermo-mechanical bending of S-FGM plates resting on variable elastic foundations using a four-variable trigonometric plate theory", *Smart Struct. Syst., Int. J.*, **18**(4), 755-786.
- Belkorissat, I., Houari, M.S.A., Tounsi, A., Adda Bedia, E.A. and Mahmoud, S.R. (2015), "On vibration properties of functionally graded nano-plate using a new nonlocal refined four variable model", *Steel Compos. Struct., Int. J.*, **18**(4), 1063-1081.
- Bellifa, H., Benrahou, K.H., Hadji, L., Houari, M.S.A. and Tounsi, A. (2016), "Bending and free vibration analysis of functionally graded plates using a simple shear deformation theory and the concept the neutral surface position", *J. Braz. Soc. Mech. Sci. Eng.*, **38**, 265-275.
- Bellifa, H., Benrahou, K.H., Bousahla, A.A., Tounsi, A. and Mahmoud, S.R. (2017a), "A nonlocal zeroth-order shear deformation theory for nonlinear postbuckling of nanobeams", *Struct. Eng. Mech., Int. J.*, **62**(6), 695-702.
- Bellifa, H., Bakora, A., Tounsi, A., Bousahla, A.A. and Mahmoud, S.R. (2017b), "An efficient and simple four variable refined plate theory for buckling analysis of functionally graded plates", *Steel Compos. Struct., Int. J.*, **25**(3), 257-270.
- Benadouda, M., Ait Atmane, H., Tounsi, A., Bernard, F. and Mahmoud, S.R. (2017), "An efficient shear deformation theory for wave propagation in functionally graded material beams with porosities", *Earthq. Struct., Int. J.*, **13**(3), 255-265.
- Benahmed, A., Houari, M.S.A., Benyoucef, S., Belakhdar, K. and Tounsi, A. (2017), "A novel quasi-3D hyperbolic shear deformation theory for functionally graded thick rectangular plates on elastic foundation", *Geomech. Eng., Int. J.*, **12**(1), 9-34.
- Benchohra, M., Driz, H., Bakora, A., Tounsi, A., Adda Bedia, E.A.

- and Mahmoud, S.R. (2018), "A new quasi-3D sinusoidal shear deformation theory for functionally graded plates", *Struct. Eng. Mech., Int. J.*, **65**(1), 19-31.
- Bennoun, M., Houari, M.S.A. and Tounsi, A. (2016), "A novel five variable refined plate theory for vibration analysis of functionally graded sandwich plates", *Mech. Adv. Mater. Struct.*, **23**(4), 423-431.
- Bensaid, I. (2017), "A refined nonlocal hyperbolic shear deformation beam model for bending and dynamic analysis of nanoscale beams", *Adv. Nano Res., Int. J.*, **5**(2), 113-126.
- Bensaid, I., Bekhadda, A. and Kerboua, B. (2018), "Dynamic analysis of higher order shear-deformable nanobeams resting on elastic foundation based on nonlocal strain gradient theory", *Adv. Nano Res., Int. J.*, **6**(3), 279-298.
- Besseghier, A., Houari, M.S.A., Tounsi, A. and Mahmoud, S.R. (2017), "Free vibration analysis of embedded nanosize FG plates using a new nonlocal trigonometric shear deformation theory", *Smart Struct. Syst., Int. J.*, **19**(6), 601-614.
- Bouadi, A., Bousahla, A.A., Houari, M.S.A., Heireche, H. and Tounsi, A. (2018), "A new nonlocal HSDT for analysis of stability of single layer graphene sheet", *Adv. Nano Res., Int. J.*, **6**(2), 147-162.
- Bouafia, K., Kaci, A., Houari, M.S.A., Benzair, A. and Tounsi, A. (2017), "A nonlocal quasi-3D theory for bending and free flexural vibration behaviors of functionally graded nanobeams", *Smart Struct. Syst., Int. J.*, **19**(2), 115-126.
- Bouazza, M., Lairedj, A., Benseddig, N. and Khalki, S. (2016), "A refined hyperbolic shear deformation theory for thermal buckling analysis of cross-ply laminated plates", *Mech. Res. Commun.*, **73**, 117-126.
- Bouazza, M., Zenkour, A.M. and Benseddig, N. (2018), "Closed-form solutions for thermal buckling analyses of advanced nanoplates according to a hyperbolic four-variable refined theory with small-scale effects", *Acta Mech.*, **229**(5), 2251-2265.
- Bouderba, B., Houari, M.S.A. and Tounsi, A. (2013), "Thermomechanical bending response of FGM thick plates resting on Winkler-Pasternak elastic foundations", *Steel Compos. Struct.*, **14**(1), 85-104.
- Bouderba, B., Houari, M.S.A. and Tounsi, A. and Mahmoud, S.R. (2016), "Thermal stability of functionally graded sandwich plates using a simple shear deformation theory", *Struct. Eng. Mech., Int. J.*, **58**(3), 397-422.
- Bouhadra, A., Tounsi, A., Bousahla, A.A., Benyoucef, S. and Mahmoud, S.R. (2018), "Improved HSDT accounting for effect of thickness stretching in advanced composite plates", *Struct. Eng. Mech., Int. J.*, **66**(1), 61-73.
- Boukhari, A., Ait Atmane, H., Houari, M.S.A., Tounsi, A., Adda Bedia, E.A. and Mahmoud, S.R. (2016), "An efficient shear deformation theory for wave propagation of functionally graded material plates", *Struct. Eng. Mech., Int. J.*, **57**(5), 837-859.
- Boukhelif, Z., Bouremana, M., Bourada, F., Bousahla, A.A., Bourada, M., Tounsi, A. and Al-Osta, M.A. (2019), "A simple quasi-3D HSDT for the dynamics analysis of FG thick plate on elastic foundation", *Steel Compos. Struct., Int. J.* [To be published]
- Bounouara, F., Benrahou, K.H., Belkorissat, I. and Tounsi, A. (2016), "A nonlocal zeroth-order shear deformation theory for free vibration of functionally graded nanoscale plates resting on elastic foundation", *Steel Compos. Struct., Int. J.*, **20**(2), 227-249.
- Bourada, M., Kaci, A., Houari, M.S.A. and Tounsi, A. (2015), "A new simple shear and normal deformations theory for functionally graded beams", *Steel Compos. Struct., Int. J.*, **18**(2), 409-423.
- Bourada, F., Amara, K., Bousahla, A.A., Tounsi, A. and Mahmoud, S.R. (2018), "A novel refined plate theory for stability analysis of hybrid and symmetric S-FGM plates", *Struct. Eng. Mech., Int. J.*, **68**(6), 661-675.
- Bourada, F., Bousahla, A.A., Bourada, M., Azzaz, A., Zinata, A. and Tounsi, A. (2019), "Dynamic investigation of porous functionally graded beam using a sinusoidal shear deformation theory", *Wind Struct., Int. J.*, **28**(1), 19-30.
- Bousahla, A.A., Houari, M.S.A., Tounsi, A. and Adda Bedia, E.A. (2014), "A novel higher order shear and normal deformation theory based on neutral surface position for bending analysis of advanced composite plates", *Int. J. Comput. Meth.*, **11**(6), 1350082.
- Bousahla, A.A., Benyoucef, S., Tounsi, A. and Mahmoud, S.R. (2016), "On thermal stability of plates with functionally graded coefficient of thermal expansion", *Struct. Eng. Mech., Int. J.*, **60**(2), 313-335.
- Chaabane, L.A., Bourada, F., Sekkal, M., Zerouati, S., Zaoui, F.Z., Tounsi, A., Derras, A., Bousahla, A.A. and Tounsi, A. (2019), "Analytical study of bending and free vibration responses of functionally graded beams resting on elastic foundation", *Struct. Eng. Mech.* [To be published]
- Cherif, R.H., Meradjah, M., Zidour, M., Tounsi, A., Belmahi, H. and Bensattalah, T. (2018), "Vibration analysis of nano beam using differential transform method including thermal effect", *J. Nano Res.*, **54**, 1-14.
- Chikh, A., Tounsi, A., Hebali, H. and Mahmoud, S.R. (2017), "Thermal buckling analysis of cross-ply laminated plates using a simplified HSDT", *Smart Struct. Syst., Int. J.*, **19**(3), 289-297.
- Chemi, A., Heireche, H., Zidour, M., Rakrak, K. and Bousahla, A.A. (2015), "Critical buckling load of chiral double-walled carbon nanotube using non-local theory elasticity", *Adv. Nano Res., Int. J.*, **3**(4), 193-206.
- Chen, Y., Lee, J.D. and Eskandarian, A. (2004), "Atomistic viewpoint of the applicability of microcontinuum theories", *Int. J. Sol. Struct.*, **41**, 2085-2097.
- Dash, S., Sharma, N., Mahapatra, T.R., Panda, S.K. and Sahu, P. (2018), "Free vibration analysis of functionally graded sandwich flat panel", *IOP Conf. Series: Materials Science and Engineering*, **377**, 012140.
- Draiche, K., Tounsi, A. and Mahmoud, S.R. (2016), "A refined theory with stretching effect for the flexure analysis of laminated composite plates", *Geomech. Eng., Int. J.*, **11**(5), 671-690.
- Draoui, A., Zidour, M., Tounsi, A. and Adim, B. (2019), "Static and dynamic behavior of nanotubes-reinforced sandwich plates using (FSDT)", *J. Nano Res.*, **57**, 117-135.
- Ebrahimi, F. and Salari, E. (2015), "Size-dependent thermo-electrical buckling analysis of functionally graded piezoelectric nanobeams", *Smart Mater. Struct.*, **24**(12), 125007.
- Ebrahimi, F. and Rastgoo, A. (2008a), "Free vibration analysis of smart annular FGM plates integrated with piezoelectric layers", *Smart Mater. Struct.*, **17**(1), 015044.
- Ebrahimi, F. and Rastgo, A. (2008b), "An analytical study on the free vibration of smart circular thin FGM plate based on classical plate theory", *Thin-Wall. Struct.*, **46**(12), 1402-1408.
- Ebrahimi, F., Rastgoo, A. and Atai, A.A. (2009a), "A theoretical analysis of smart moderately thick shear deformable annular functionally graded plate", *Eur. J. Mech. -A/Solids*, **28**(5), 962-973.
- Ebrahimi, F., Naei, M.H. and Rastgoo, A. (2009b), "Geometrically nonlinear vibration analysis of piezoelectrically actuated FGM plate with an initial large deformation", *J. Mech. Sci. Tech.*, **23**(8), 2107-2124.
- Ebrahimi, F., Mahmoodi, F. and Barati, M.R. (2017), "Thermo-mechanical vibration analysis of functionally graded micro/nanoscale beams with porosities based on modified couple stress theory", *Adv. Mater. Res., Int. J.*, **6**(3), 279-301.
- Ehyaei, J., Akbarshahi, A. and Shafiei, N. (2017), "Influence of porosity and axial preload on vibration behavior of rotating FG nanobeam", *Adv. Nano Res., Int. J.*, **5**(2), 141-169.

- El-Haina, F., Bakora, A., Bousahla, A.A., Tounsi, A. and Mahmoud, S.R. (2017), "A simple analytical approach for thermal buckling of thick functionally graded sandwich plates", *Struct. Eng. Mech., Int. J.*, **63**(5), 585-595.
- Ellali, M., Amara, K., Bouazza, M. and Bourada, F. (2018), "The buckling of piezoelectric plates on Pasternak elastic foundation using higher order shear deformation plate theories", *Smart Struct. Syst., Int. J.*, **21**(1), 113-122.
- Eltaher, M.A., Emam, S.A. and Mahmoud, F.F. (2012), "Free vibration analysis of functionally graded size-dependent nanobeams", *Appl. Math. Computat.*, **218**, 7406-7420.
- Eltaher, M.A., Alshorbagy, A.E. and Mahmoud, F.F. (2013a), "Determination of neutral axis position and its effect on natural frequencies of functionally graded macro/nanobeams", *Compos. Struct.*, **99**, 193-201.
- Eltaher, M.A., Emam, S.A. and Mahmoud, F.F. (2013b), "Static and stability analysis of nonlocal functionally graded nanobeams", *Compos. Struct.*, **96**, 82-88.
- Eltaher, M.A., Khater, M.E., Park, S., Abdel-Rahman, E. and Yavuz, M. (2016), "On the static stability of nonlocal nanobeams using higher-order beam theories", *Adv. Nano Res., Int. J.*, **4**(1), 51-64.
- Eringen, A.C. (1972), "Nonlocal polar elastic continua", *Int. J. Eng. Sci.*, **10**, 1-16.
- Eringen, A.C. (1983), "On differential equations of nonlocal elasticity and solutions of screw dislocation and surface waves", *J. Appl. Phys.*, **54**, 4703-4710.
- Eringen, A.C. and Edelen, D. (1972), "On nonlocal elasticity", *Int. J. Eng. Sci.*, **10**, 233-248.
- Fahsi, A., Tounsi, A., Hebbali, H., Chikh, A., Adda Bedia, E.A. and Mahmoud, S.R. (2017), "A four variable refined nth-order shear deformation theory for mechanical and thermal buckling analysis of functionally graded plates", *Geomech. Eng., Int. J.*, **13**(3), 385-410.
- Faleh, N.M., Ahmed, R.A. and Fenjan, R.M. (2018a), "On vibrations of porous FG nanoshells", *Int. J. Eng. Sci.*, **133**, 1-14.
- Faleh, N.M., Fenjan, R.M. and Ahmed, R.A. (2018b), "Dynamic analysis of graded small-scale shells with porosity distributions under transverse dynamic loads", *Eur. Phys. J. Plus*, **133**, 348.
- Fourn, H., Ait Atmane, H., Bourada, M., Bousahla, A.A., Tounsi, A. and Mahmoud, S.R. (2018), "A novel four variable refined plate theory for wave propagation in functionally graded material plates", *Steel Compos. Struct., Int. J.*, **27**(1), 109-122.
- Ghorbanpour Arani, A., Kolahchi, R. and Vossough, H. (2012), "Buckling analysis and smart control of SLGS using elastically coupled PVDF nanoplate based on the nonlocal Mindlin plate theory", *Physica B: Condensed Matter*, **407**(22), 4458-4465.
- Hachemi, H., Kaci, A., Houari, M.S.A., Bourada, A., Tounsi, A. and Mahmoud, S.R. (2017), "A new simple three-unknown shear deformation theory for bending analysis of FG plates resting on elastic foundations", *Steel Compos. Struct., Int. J.*, **25**(6), 717-726.
- Hamidi, A., Houari, M.S.A., Mahmoud, S.R. and Tounsi, A. (2015), "A sinusoidal plate theory with 5-unknowns and stretching effect for thermomechanical bending of functionally graded sandwich plates", *Steel Compos. Struct., Int. J.*, **18**(1), 235-253.
- Hebbali, H., Tounsi, A., Houari, M.S.A., Bessaim, A. and Adda Bedia, E.A. (2014), "A new quasi-3D hyperbolic shear deformation theory for the static and free vibration analysis of functionally graded plates", *ASCE J. Eng. Mech.*, **140**, 374-383.
- Heireche, H., Tounsi, A., Benzair, A., Maachou, M. and Bedia, E.A. (2008), "Sound wave propagation in single-walled carbon nanotubes using nonlocal elasticity", *Phys. E*, **40**, 2791-2799.
- Hirwani, C.K., Panda, S.K., Mahapatra, T.R. and Mahapatra, S.S. (2017), "Numerical study and experimental validation of dynamic characteristics of delaminated composite flat and curved shallow shell structure", *J. Aerosp. Eng.*, **30**(5), 04017045.
- Hosseini-Hashemi, S., Taher, H.R.D., Akhavan, H. and Omid, M. (2010), "Free vibration of functionally graded rectangular plates using first-order shear deformation plate theory", *Appl. Math. Model.*, **34**, 1276-1291.
- Hosseini-Hashemi, S., Bedroud, M. and Nazemnezhad, R. (2013a), "An exact analytical solution for free vibration of functionally graded circular/annular Mindlin nanoplates via nonlocal elasticity", *Compos. Struct.*, **103**, 108-118.
- Hosseini-Hashemi, S., Zare, M. and Nazemnezhad, R. (2013b), "An exact analytical approach for free vibration of Mindlin rectangular nanoplates via nonlocal elasticity", *Compos. Struct.*, **100**, 290-299.
- Houari, M.S.A., Tounsi, A., Bessaim, A. and Mahmoud, S.R. (2016), "A new simple three-unknown sinusoidal shear deformation theory for functionally graded plates", *Steel Compos. Struct., Int. J.*, **22**(2), 257-276.
- Huang, C., Yang, P. and Chang, M. (2012), "Threedimensional vibration analyses of functionally graded material rectangular plates with through internal cracks", *Compos. Struct.*, **94**, 2764-2776.
- Iijima, S. (1991), "Helical microtubules of graphitic carbon", *Nature*, **354**, 56-58.
- Janghorban, M. (2016), "Static analysis of functionally graded rectangular nanoplates based on nonlocal third order shear deformation theory", *Int. J. Eng. Appl. Sci. (IJEAS)*, **8**(2), 87-100.
- Kaci, A., Houari, M.S.A., Bousahla, A.A., Tounsi, A. and Mahmoud, S.R. (2018), "Post-buckling analysis of shear-deformable composite beams using a novel simple two-unknown beam theory", *Struct. Eng. Mech., Int. J.*, **65**(5), 621-631.
- Kadari, B., Bessaim, A., Tounsi, A., Heireche, H., Bousahla, A.A. and Houari, M.S.A. (2018), "Buckling analysis of orthotropic nanoscale plates resting on elastic foundations", *J. Nano Res.*, **55**, 42-56.
- Kar, V.R. and Panda, S.K. (2016a), "Geometrical nonlinear free vibration analysis of FGM spherical panel under nonlinear thermal loading with TD and TID properties", *J. Thermal Stress.*, **39**(8), 942-959.
- Kar, V.R. and Panda, S.K. (2016b), "Nonlinear thermomechanical deformation behaviour of P-FGM shallow spherical shell panel", *Chinese J. Aeronaut.*, **29**(1), 173-183.
- Karami, B., Janghorban, M. and Tounsi, A. (2017), "Effects of triaxial magnetic field on the anisotropic nanoplates", *Steel Compos. Struct., Int. J.*, **25**(3), 361-374.
- Karami, B., Janghorban, M. and Tounsi, A. (2018a), "Variational approach for wave dispersion in anisotropic doubly-curved nanoshells based on a new nonlocal strain gradient higher order shell theory", *Thin-Wall. Struct.*, **129**, 251-264.
- Karami, B., Janghorban, M., Shahsavari, D. and Tounsi, A. (2018b), "A size-dependent quasi-3D model for wave dispersion analysis of FG nanoplates", *Steel Compos. Struct., Int. J.*, **28**(1), 99-110.
- Karami, B., Janghorban, M. and Tounsi, A. (2018c), "Nonlocal strain gradient 3D elasticity theory for anisotropic spherical nanoparticles", *Steel Compos. Struct., Int. J.*, **27**(2), 201-216.
- Karami, B., Janghorban, M. and Tounsi, A. (2018d), "Galerkin's approach for buckling analysis of functionally graded anisotropic nanoplates/different boundary conditions", *Eng. Comput.* [In press]
- Karami, B., Shahsavari, D., Janghorban, M. and Tounsi, A. (2019a), "Resonance behavior of functionally graded polymer composite nanoplates reinforced with grapheme nanoplatelets", *Int. J. Mech. Sci.*, **156**, 94-105.
- Karami, B., Janghorban, M. and Tounsi, A. (2019b), "On exact wave propagation analysis of triclinic material using three

- dimensional bi-Helmholtz gradient plate model", *Struct. Eng. Mech.*, **69**(5), 487-497.
- Karami, B., Janghorban, M. and Tounsi, A. (2019c), "Wave propagation of functionally graded anisotropic nanoplates resting on Winkler-Pasternak foundation", *Struct. Eng. Mech., Int. J.*, **7**(1), 55-66.
- Katariya, P.V. and Panda, S.K. (2018), "Numerical evaluation of transient deflection and frequency responses of sandwich shell structure using higher order theory and different mechanical loadings", *Eng. Comput.* [In press]
- Katariya, P.V. and Panda, S.K. (2019), "Frequency and deflection responses of shear deformable skew sandwich curved shell panel: A Finite Element Approach", *Arab. J. Sci. Eng.*, **44**(2), 1631-1648.
- Katariya, P.V., Panda, S.K. and Mahapatra, T.R. (2017a), "Prediction of nonlinear eigenfrequency of laminated curved sandwich structure using higher-order equivalent single-layer theory", *J. Sandw. Struct. Mater.* [In press]
- Katariya, P.V., Panda, S.K., Hirwani, C.K., Mehar, K. and Thakare, O. (2017b), "Enhancement of thermal buckling strength of laminated sandwich composite panel structure embedded with shape memory alloy fibre", *Smart Struct. Syst., Int. J.*, **20**(5), 595-605.
- Katariya, P.V., Panda, S.K. and Mahapatra, T.R. (2017c), "Nonlinear thermal buckling behaviour of laminated composite panel structure including the stretching effect and higher-order finite element", *Adv. Mater. Res., Int. J.*, **6**(4), 349-361.
- Katariya, P.V., Das, A. and Panda, S.K. (2018a), "Buckling analysis of SMA bonded sandwich structure – using FEM", *IOP Conf. Series: Materials Science and Engineering*, **338**, 012035.
- Katariya, P.V., Panda, S.K. and Mahapatra, T.R. (2018b) "Bending and vibration analysis of skew sandwich plate", *Aircraft Eng. Aerosp. Technol.*, **90**(6), 885-895.
- Katariya, P.V., Hirwani, C.K. and Panda, S.K. (2019), "Geometrically nonlinear deflection and stress analysis of skew sandwich shell panel using higher-order theory", *Eng. Comput.*, **35**(2), 467-485.
- Ke, L.L., Yang, J., Kitipornchai, S. and Bradford, M.A. (2012), "Bending, buckling and vibration of size-dependent functionally graded annular microplates", *Compos. Struct.*, **94**, 3250-3257.
- Ke, L.L., Yang, J., Kitipornchai, S., Bradford, M.A. and Wang, Y.S. (2013), "Axisymmetric nonlinear free vibration of size-dependent functionally graded annular microplates", *Compos. Part B: Eng.*, **53**, 207-217.
- Khetir, H., Bachir Bouiadja, M., Houari, M.S.A., Tounsi, A. and Mahmoud, S.R. (2017), "A new nonlocal trigonometric shear deformation theory for thermal buckling analysis of embedded nanosize FG plates", *Struct. Eng. Mech., Int. J.*, **64**(4), 391-402.
- Khiloun, M., Bousahla, A.A., Kaci, A., Bessaim, A., Tounsi, A. and Mahmoud, S.R. (2019), "Analytical modeling of bending and vibration of thick advanced composite plates using a four-variable quasi 3D HSDT", *Eng. Comput.* [In press]
- Khorshidi, K., Asgari, T. and Fallah, A. (2015), "Free vibrations analysis of functionally graded rectangular nano-plates based on nonlocal exponential shear deformation theory", *Mech. Adv. Compos. Struct.*, **2**, 79-93.
- Klouche, F., Darcherif, L., Sekkal, M., Tounsi, A. and Mahmoud, S.R. (2017), "An original single variable shear deformation theory for buckling analysis of thick isotropic plates", *Struct. Eng. Mech., Int. J.*, **63**(4), 439-446.
- Kocaturk, T. and Akbas, S.D. (2012), "Post-buckling analysis of Timoshenko beams made of functionally graded material under thermal loading", *Struct. Eng. Mech., Int. J.*, **41**(6), 775-789.
- Koiter, W.T. (1969), "Couple-stresses in the theory of elasticity, I & II", *J. Philosoph. Transact. Royal Soc. London B*, **67**, 17-44.
- Kumar, Y. and Lal, R. (2013), "Prediction of frequencies of free axisymmetric vibration of twodirectional functionally graded annular plates on Winkler foundation", *Eur. J. Mech. A Solid*, **42**, 219-228.
- Lam, D.C.C., Yang, F., Chong, A.C.M. and Tong, P. (2003), "Experiments and theory in strain gradient elasticity", *J. Mech. Phys. Solids*, **51**, 1477-1508.
- Larbi Chaht, F., Kaci, A., Houari, M.S.A., Tounsi, A., Anwar Bég, O. and Mahmoud, S.R. (2015), "Bending and buckling analyses of functionally graded material (FGM) size-dependent nanoscale beams including the thickness stretching effect", *Steel. Compos. Struct., Int. J.*, **18**(2), 425-442.
- Li, L., Li, X. and Hu, Y. (2016), "Free vibration analysis of nonlocal strain gradient beams made of functionally graded material", *Int. J. Eng. Sci.*, **102**, 77-92.
- Ma, M., Tu, J.P., Yuan, Y.F., Wang, X.L., Li, K.F., Mao, F. and Zeng, Z.Y. (2008), "Electrochemical performance of ZnO nanoplates as anode materials for Ni/Zn secondary batteries", *J. Power Sources*, **179**, 395-400.
- Mahi, A., Adda Bedia, E.A. and Tounsi, A. (2015), "A new hyperbolic shear deformation theory for bending and free vibration analysis of isotropic, functionally graded, sandwich and laminated composite plates", *Appl. Math. Model.*, **39**, 2489-2508.
- Malekzadeh, P. and Beni, A.A. (2010), "Free vibration of functionally graded arbitrary straight-sided quadrilateral plates in thermal environment", *Compos. Struct.*, **92**, 2758-2767.
- Malekzadeh, P. and Heydarpour, Y. (2012), "Free vibration analysis of rotating functionally graded cylindrical shells in thermal environment", *Compos. Struct.*, **94**, 2971-2981.
- Matsunaga, H. (2008), "Free vibration and stability of functionally graded plates according to a 2-D higher-order deformation theory", *Compos. Struct.*, **82**, 499-512.
- Mehar, K. and Panda, S.K. (2016), "Geometrical nonlinear free vibration analysis of FG-CNT reinforced composite flat panel under uniform thermal field", *Compos. Struct.*, **143**, 336-346.
- Mehar, K. and Panda, S.K. (2018), "Nonlinear finite element solutions of thermoelastic flexural strength and stress values of temperature dependent graded CNT-reinforced sandwich shallow shell structure", *Struct. Eng. Mech., Int. J.*, **67**(6), 565-578.
- Mehar, K., Panda, S.K. and Patle, B.K. (2017), "Thermoelastic vibration and flexural behavior of FG-CNT reinforced composite curved panel", *Int. J. Appl. Mech.*, **9**(4), 1750046.
- Mehar, K., Panda, S.K. and Patle, B.K. (2018a), "Stress, deflection, and frequency analysis of CNT reinforced graded sandwich plate under uniform and linear thermal environment: A finite element approach", *Polym. Compos.*, **39**(10), 3792-3809.
- Mehar, K., Mahapatra, T.R., Panda, S.K., Katariya, P.V. and Tompe, U.K. (2018b), "Finite-element solution to nonlocal elasticity and scale effect on frequency behavior of shear deformable nanoplate structure", *J. Eng. Mech.*, **144**(9), 04018094.
- Meksi, R., Benyoucef, S., Mahmoudi, A., Tounsi, A., Adda Bedia, E.A. and Mahmoud, S.R. (2019), "An analytical solution for bending, buckling and vibration responses of FGM sandwich plates", *J. Sandw. Struct. Mater.*, **21**(2), 727-757.
- Menasria, A., Bouhadra, A., Tounsi, A., Bousahla, A.A. and Mahmoud, S.R. (2017), "A new and simple HSDT for thermal stability analysis of FG sandwich plates", *Steel Compos. Struct., Int. J.*, **25**(2), 157-175.
- Meziane, M.A.A., Abdelaziz, H.H. and Tounsi, A. (2014), "An efficient and simple refined theory for buckling and free vibration of exponentially graded sandwich plates under various boundary conditions", *J. Sandw. Struct. Mater.*, **16**(3), 293-318.
- Miller, R.E. and Shenoy, V.B. (2000), "Size-dependent elastic properties of nanosized structural elements", *Nanotechnology*, **11**, 139.
- Mindlin, R. and Tiersten, H. (1962), "Effects of couple-stresses in linear elasticity", *Arch. Rational Mech. Anal.*, **11**, 415-448.

- Mokhtar, Y., Heireche, H., Bousahla, A.A., Houari, M.S.A., Tounsi, A. and Mahmoud, S.R. (2018), "A novel shear deformation theory for buckling analysis of single layer graphene sheet based on nonlocal elasticity theory", *Smart Struct. Syst., Int. J.*, **21**(4), 397-405.
- Mouffoki, A., Adda Bedia, E.A., Houari, M.S.A., Tounsi, A. and Mahmoud, S.R. (2017), "Vibration analysis of nonlocal advanced nanobeams in hygro-thermal environment using a new two-unknown trigonometric shear deformation beam theory", *Smart Struct. Syst., Int. J.*, **20**(3), 369-383.
- Murmu, T. and Pradhan, S. (2009a), "Buckling analysis of a single-walled carbon nanotube embedded in an elastic medium based on nonlocal elasticity and Timoshenko beam theory and using DQM", *Phys. E*, **41**, 1232-1239.
- Murmu, T. and Pradhan, S. (2009b), "Thermo-mechanical vibration of a single-walled carbon nanotube embedded in an elastic medium based on nonlocal elasticity theory", *Comput. Mater. Sci.*, **46**, 854-859.
- Narendar, S. (2011), "Buckling analysis of micro-/nano-scale plates based on two-variable refined plate theory incorporating nonlocal scale effects", *Compos. Struct.*, **93**, 3093-3103.
- Nie, G. and Zhong, Z. (2007), "Semi-analytical solution for three-dimensional vibration of functionally graded circular plates", *Comput. Method Appl. M*, **196**, 4901-4910.
- Nix, W.D. and Gao, H. (1998), "Indentation size effects in crystalline materials: a law for strain gradient plasticity", *J. Mech. Phys. Solids*, **46**, 411-425.
- Peddieson, J., Buchanan, G.R. and McNitt, R.P. (2003), "Application of nonlocal continuum models to nanotechnology", *Int. J. Eng. Sci.*, **41**, 305-312.
- Pradhan, S. and Phadikar, J. (2009), "Small scale effect on vibration of embedded multilayered graphene sheets based on nonlocal continuum models", *Phys. Lett. A*, **373**, 1062-1069.
- Pradyumna, S. and Bandyopadhyay, J. (2008), "Free vibration analysis of functionally graded curved panels using a higher-order finiteelement formulation", *J. Sound Vib.*, **318**, 176-192.
- Rahmani, O. and Pedram, O. (2014), "Analysis and modeling the size effect on vibration of functionally graded nanobeams based on nonlocal Timoshenko beam theory", *Int. J. Eng. Sci.*, **77**, 55-70.
- Rafiee, M.A., Rafiee, J., Srivastava, I., Wang, Z., Song, H., Yu, Z.Z. and Koratkar, N. (2010), "Fracture and fatigue in graphene nanocomposites", *small*, **6**, 179-183.
- Reddy, J. (2007), "Nonlocal theories for bending, buckling and vibration of beams", *Int. J. Eng. Sci.*, **45**, 288-307.
- Reddy, J. (2011), "Microstructure-dependent couple stress theories of functionally graded beams", *J. Mech. Phys. Solids*, **59**, 2382-2399.
- Reddy, J. and Pang, S. (2008), "Nonlocal continuum theories of beams for the analysis of carbon nanotubes", *J. Appl. Phys.*, **103**, 023511.
- Sahoo, S.S., Panda, S.K. and Sen, D. (2016), "Effect of delamination on static and dynamic behavior of laminated composite plate", *AIAA Journal*, **54**(8), 2530-2544.
- Sahoo, S.S., Panda, S.K. and Singh, V.K. (2017), "Experimental and numerical investigation of static and free vibration responses of woven glass/epoxy laminated composite plate", *Proceedings of the Institution of Mechanical Engineers, Part L: Journal of Materials: Design and Applications*, **231**(5), 463-478.
- Sakhaee-Pour, A., Ahmadian, M. and Vafai, A. (2008a), "Applications of single-layered graphene sheets as mass sensors and atomistic dust detectors", *Solid State Commun.*, **145**, 168-172.
- Sakhaee-Pour, A., Ahmadian, M. and Vafai, A. (2008b), "Potential application of single-layered graphene sheet as strain sensor", *Solid State Commun.*, **147**, 336-340.
- Sekkal, M., Fahsi, B., Tounsi, A. and Mahmoud, S.R. (2017a), "A novel and simple higher order shear deformation theory for stability and vibration of functionally graded sandwich plate", *Steel Compos. Struct., Int. J.*, **25**(4), 389-401.
- Sekkal, M., Fahsi, B., Tounsi, A. and Mahmoud, S.R. (2017b), "A new quasi-3D HSDT for buckling and vibration of FG plate", *Struct. Eng. Mech., Int. J.*, **64**(6), 737-749.
- Semmah, A., Heireche, H., Bousahla, A.A. and Tounsi, A. (2019), "Thermal buckling analysis of SWBNNT on Winkler foundation by non local FSDT", *Adv. Nano Res., Int. J.*, **7**(2), 89-98.
- Shahadat, M.R.B., Alam, M.F., Mandal, M.N.A. and Ali, M.M. (2018), "Thermal transportation behaviour prediction of defective graphene sheet at various temperature: A Molecular Dynamics Study", *Am. J. Nanomater.*, **6**(1), 34-40.
- Shahsavari, D., Karami, B. and Li, L. (2018), "A high-order gradient model for wavepropagation analysis of porous FG nanoplates", *Steel Compos. Struct., Int. J.*, **29**(1), 53-66.
- Shen, H.S. and Zhang, C.L. (2010), "Torsional buckling and postbuckling of double-walled carbon nanotubes by nonlocal shear deformable shell model", *Compos. Struct.*, **92**, 1073-1084.
- Singh, V.K. and Panda, S.K. (2017), "Geometrical nonlinear free vibration analysis of laminated composite doubly curved shell panels embedded with piezoelectric layers", *J. Vib. Control*, **23**(13), 2078-2093.
- Tang, Y. and Liu, Y. (2018), "Effect of van der Waals force on wave propagation in viscoelastic double-walled carbon nanotubes", *Modern Phys. Lett. B*, **32**(24), 1850291.
- Tlidji, Y., Zidour, M., Draiche, K., Safa, A., Bourada, M., Tounsi, A., Bousahla, A.A. and Mahmoud, S.R. (2019), "Vibration analysis of different material distributions of functionally graded microbeam", *Struct. Eng. Mech., Int. J.*, **69**(6), 637-649.
- Toupin, R.A. (1962), "Elastic materials with couple-stresses", *Arch. Rational Mech. Anal.*, **11**, 385-414.
- Tounsi, A., Houari, M.S.A., Benyoucef, S. and Adda Bedia, E.A. (2013), "A refined trigonometric shear deformation theory for thermoelastic bending of functionally graded sandwich plates", *Aerosp. Sci. Tech.*, **24**, 209-220.
- Ungbhakorn, V. and Wattanasakulpong, N. (2013), "Thermo-elastic vibration analysis of third order shear deformable functionally graded plates with distributed patch mass under thermal environment", *Appl. Acoust.*, **74**, 1045-1059.
- Vel, S.S. and Batra, R. (2004), "Three-dimensional exact solution for the vibration of functionally graded rectangular plates", *J. Sound Vib.*, **272**, 703-730.
- Wang, L. (2009), "Dynamical behaviors of double walled carbon nanotubes conveying fluid accounting for the role of small length scale", *Comput. Mater. Sci.*, **45**, 584-588.
- Wu, C.P., Chen, Y.H., Hong, Z.L. and Lin, C.H. (2018), "Nonlinear vibration analysis of an embedded multi-walled carbon nanotube", *Adv. Nano Res., Int. J.*, **6**(2), 163-182.
- Yahia, S.A., Ait Atmane, H., Houari, M.S.A. and Tounsi, A. (2015), "Wave propagation in functionally graded plates with porosities using various higher-order shear deformation plate theories", *Struct. Eng. Mech., Int. J.*, **53**(6), 1143-1165.
- Yazid, M., Heireche, H., Tounsi, A., Bousahla, A.A. and Houari, M.S.A. (2018), "A novel nonlocal refined plate theory for stability response of orthotropic single-layer graphene sheet resting on elastic medium", *Smart Struct. Syst., Int. J.*, **21**(1), 15-25.
- Ye, C., Bando, Y., Shen, G. and Golberg, D. (2006), "Thickness-dependent photocatalytic performance of ZnO nanoplatelets", *J. Phys. Chem. B*, **110**, 15146-15151.
- Youcef, D.O., Kaci, A., Benzair, A., Bousahla, A.A. and Tounsi, A. (2018), "Dynamic analysis of nanoscale beams including surface stress effects", *Smart Struct. Syst., Int. J.*, **21**(1), 65-74.
- Younsi, A., Tounsi, A., Zaoui, F.Z., Bousahla, A.A. and Mahmoud, S.R. (2018), "Novel quasi-3D and 2D shear deformation theories for bending and free vibration analysis of FGM plates",

- Geomech. Eng., Int. J.*, **14**(6), 519-532.
- Zaoui, F.Z., Ouinas, D. and Tounsi, A. (2019), "New 2D and quasi-3D shear deformation theories for free vibration of functionally graded plates on elastic foundations", *Compos. Part B*, **159**, 231-247.
- Zemri, A., Houari, M.S.A., Bousahla, A.A. and Tounsi, A. (2015), "A mechanical response of functionally graded nanoscale beam: an assessment of a refined nonlocal shear deformation theory beam theory", *Struct. Eng. Mech., Int. J.*, **54**(4), 693-710.
- Zhao, X., Lee, Y. and Liew, K.M. (2009), "Free vibration analysis of functionally graded plates using the element-free kp-Ritz method", *J. Sound Vib.*, **319**, 918-939.
- Zidi, M., Tounsi, A., Houari, M.S.A. and Bég, O.A. (2014), "Bending analysis of FGM plates under hygro-thermo-mechanical loading using a four variable refined plate theory", *Aerosp. Sci. Tech.*, **34**, 24-34.
- Zidi, M., Houari, M.S.A., Tounsi, A., Bessaim, A. and Mahmoud, S.R. (2017), "A novel simple two-unknown hyperbolic shear deformation theory for functionally graded beams", *Struct. Eng. Mech., Int. J.*, **64**(2), 145-153.
- Zine, A., Tounsi, A., Draiche, K., Sekkal, M. and Mahmoud, S.R. (2018), "A novel higher-order shear deformation theory for bending and free vibration analysis of isotropic and multilayered plates and shells", *Steel Compos. Struct., Int. J.*, **26**(2), 125-137.